

PORT AUTHORITY OF NY & NJ



WORLD TRADE CENTER

**MANDATED
Fire Alarm Guidelines**

**SIEMENS
Cerberus Division
Special Projects Group/WTC**

**1-800-834-3843
Option (1)
For Design Services**

WTC Base Building Fire Alarm System
Design, Construction, Maintenance &
Technical Support Services

March, 1999

Introduction

The World Trade Center Base Building Fire Alarm Systems protect the 12 Million Square Feet of Facilities that make up the WTC Complex. Each system has been designed, installed and tested subject to a set of building standards which insure uniformity, compatibility and functionality. This guideline manual is a compilation of those building standards.

This guideline manual is intended as a resource to the Fire Alarm Design Engineer tasked with interfacing to the WTC Base Building Fire Alarm System. No document, regardless of how well intended can provide every answer, in those instances ask questions before making assumptions. These guidelines do not relieve the Professional Engineers responsibility to provide an operational, code compliant design which fulfills the Fire Protection requirements of the World Trade Center.

This guideline manual is applicable to the WTC Class E Base Building Fire Alarm Systems installed at 1 & 2 World Trade Center.

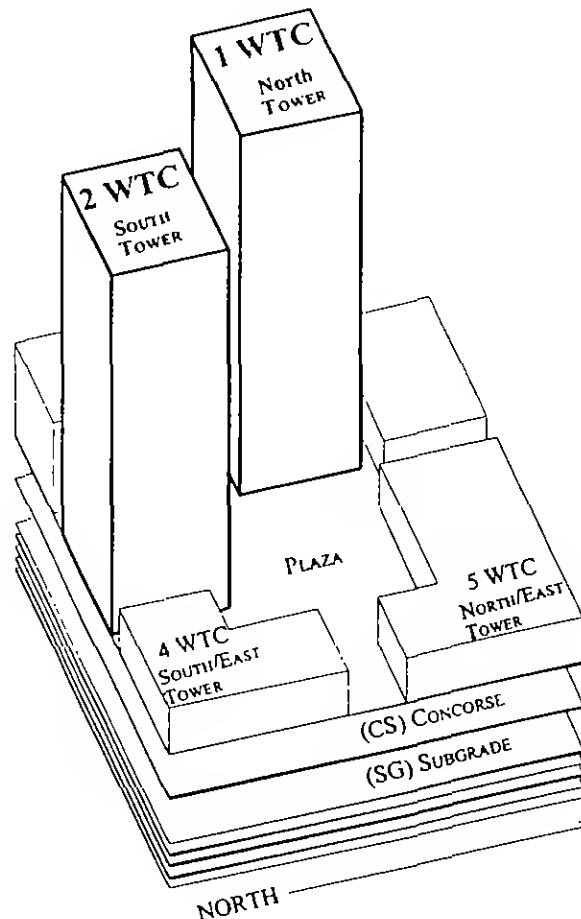


FIGURE 1 - WTC COMPLEX

Terms, Definitions and General Information

This Page describes the various abbreviations and terminology utilized on Drawings, Specifications and other Documents. In general this is the "language" which allows the designers, engineers, installers, technicians, inspectors and users to communicate effectively.

WTC	World Trade Center	The physical complex located in Manhattan, NYC
BBFA	Base Building Fire Alarm System	The Core Fire Alarm System at the WTC also referred to as the "Class E System"
PANYNJ	Port Authority of NY & NJ	The Owner and Authority having Jurisdiction.
NYC-MEA	NYC - Materials/Equipment Approval	The Listing Requirements all Fire Alarm System must achieve.
NYCBC	New York City Building Code	The Code Requirements all Fire Alarm Systems must achieve
CSD	Siemens / Cerberus Division	The BBFAS Manufacturer, Vender and Maintainer.
MXLV	Integrated Fire/Evac System	The Model of the BBFAS Systems.
NT	North Tower	1 World Trade Center Building - 110 Stories
ST	South Tower	2 World Trade Center Building - 110 Stories
SE	Southeast Plaza	4 World Trade Center - 9 Stories
NE	Northeast Plaza	5 World Trade Center - 9 Stories
CS	Concourse (310 Level)	Indoor Shopping Mall - 1 Story
SG	Subgrade	Parking, Utilities, Storage - 6 Levels Below Grade
FCS	Fire Command Station	The primary Fire Command Location(s)
RCS	Remote Command Station	The secondary Fire Command Location(s)
TSC	Terminal Strip Cabinet - Distribution Circuits	The Distribution / Interface cabinet for SPK & STR Circuits
TIB	Terminal Strip Cabinet - Distribution / Addressable Circuits	The connection point for signalling and addressable circuits. (Used in the concourse only)
ATC	ALD Terminal Cabinet	The Distribution / Interface cabinet for ALD Circuits
ALD	Analog Loop Driver	The Addressable Data circuit(s) which all smoke detectors and other initiating devices are connected to.
SPK	Notification Appliance Circuit - Speaker	The audible occupant signalling, made up of distributed engineered speaker coverage in all areas.
STR	Notification Appliance Circuit - Strobe	The visual occupant signalling, made up of distributed engineered strobe coverage in all areas.


Backbone System Architecture

This page describes the WTC Base Building Fire Alarm System Backbone or "Platform". This represents the core system consisting of selected control, wiring and interface hardware. All Base Building Detection, Notification and Control is handled by and through this system.

There are (6) individual systems protecting the WTC Complex. Each is a Siemens/Cerberus Division MXLV Integrated Fire/Evac System. The (6) Systems protect the following buildings and areas: 1 WTC (NT-North Tower), 2 WTC (ST-South Tower), 4WTC (SE-Southeast Plaza Building), 5WTC (NE-Northeast Plaza Building), Concourse/Mall (CS-Concourse), and the Parking, Storage and Utility Spaces found below grade level (SG-Subgrade).

Distributed throughout the complex are various transponders, terminal cabinets and interface points which provide access to the BBFAS platform.

Figure 2 below is for reference only, representative of a selected cross section of the BBFAS. Detailed information related to connections can be found within this guidelines manual.

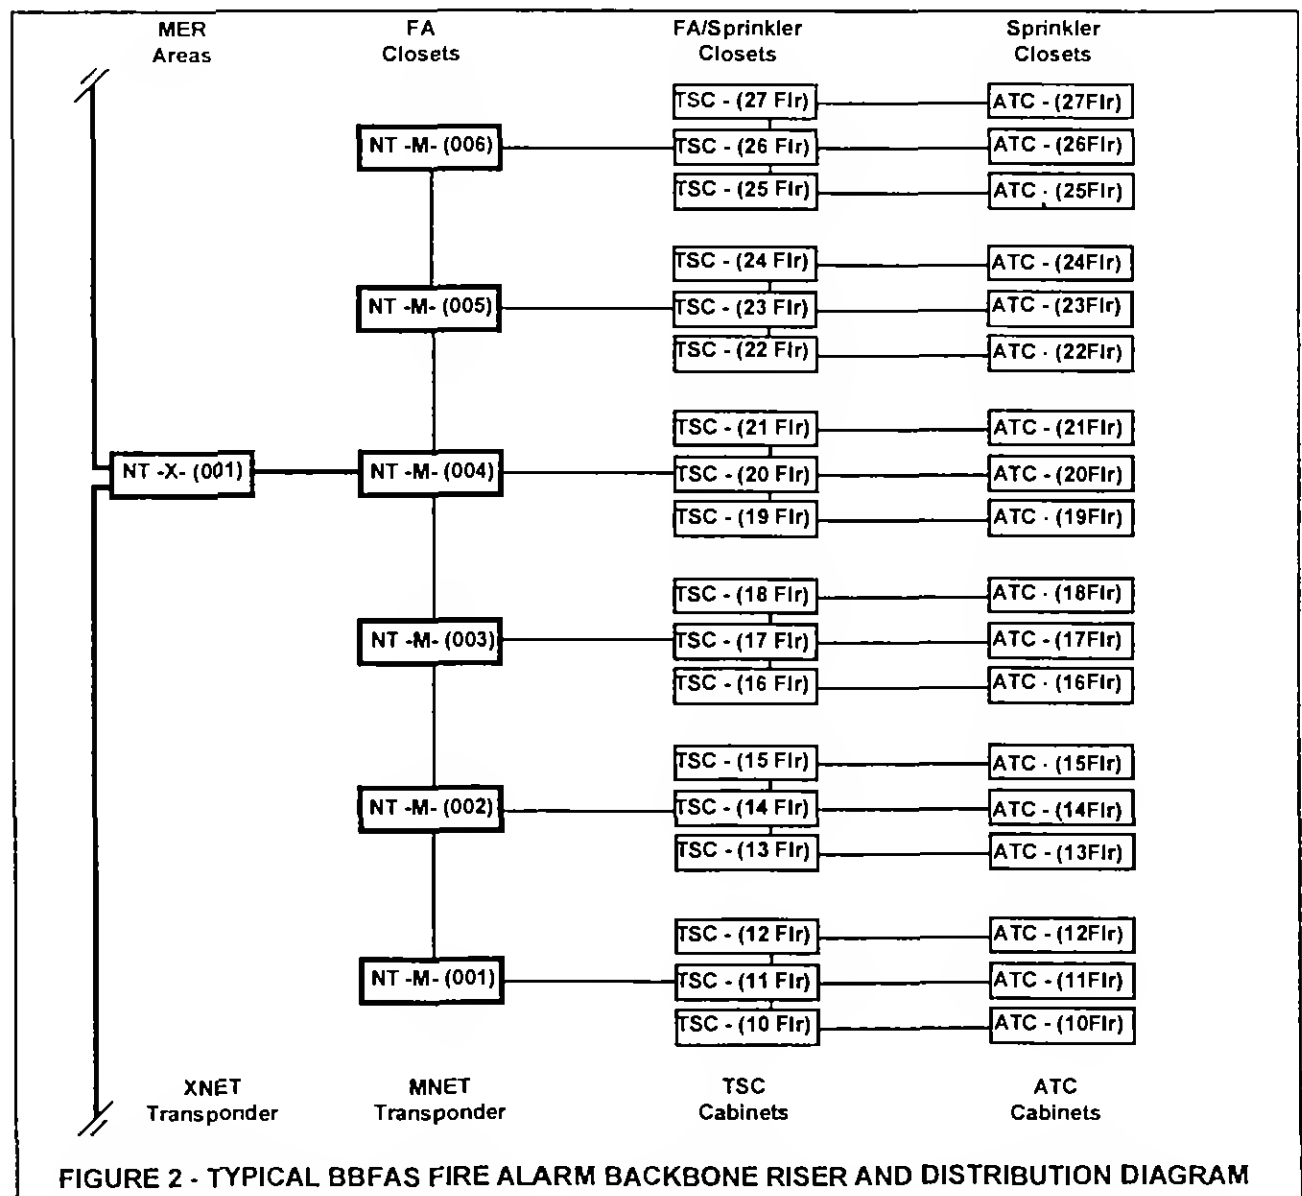

This Page describes what, how and where TCS & ATC cabinets are used to provide ALD, Speaker & Strobe circuits to each floor.

The TSC Cabinet can be found in the Core Fire Alarm Closet (FC) on Transponder equipped floors or in the Fire Sprinkler Closet (CS) on all others. Each TSC is equipped to provide:

The ATC Cabinet can be found in the Core Fire Sprinkler Closet (SC).

Each ATC is equipped to provide (1) Class B ALD Addressable Device loop divided into (5) Use Specific Branch circuits as follows:

AREA Branch: Open Area Smoke Detectors - Phone, Elect, & FA Closets

TEN1 Branch: Tenant Subsystem Interface 1 - TRI Monitoring

TEN2 Branch: Tenant Subsystem Interface 2 - TRI Monitoring

Both the TSC & ATC are Pre-Installed & Configured as part of the BBFAS.

The Engineer is responsible to verify field conditions as to the availability and capacity of circuits.

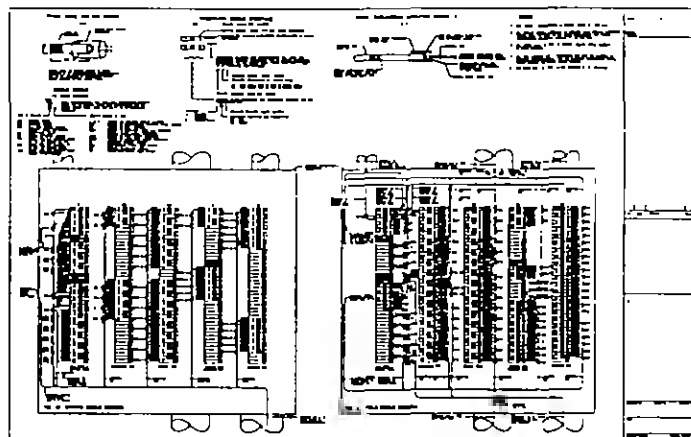


FIGURE 3
Typical TSC Cabinet

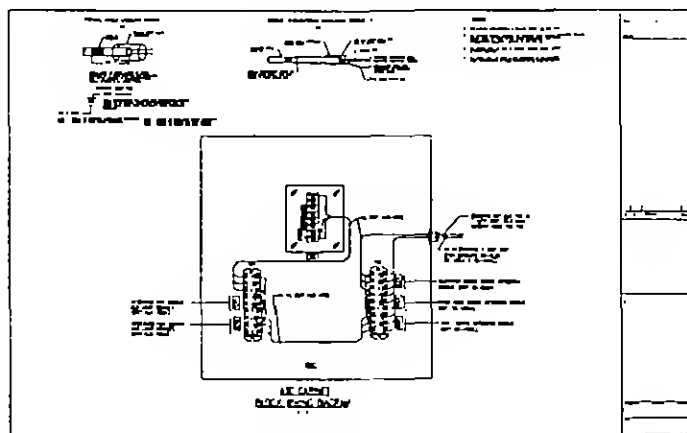



FIGURE 4
Typical ATC Cabinet

System Design - Riser & One Line Drawings

This Page describes how the Riser/One Line Drawing is incorporated into the Design and Drawing Package.

The Riser/One Line Drawing is required. The drawing must show in diagrammatic format each cabinet, circuit, raceway, notification appliance type with respective audio power in watts and intensity power in candela, detection device type with respective address and mounting location, and any other information which may be needed to cross check the plans.

The sample reference drawing shown can be found in B Size (11 x 17) in the rear of this manual

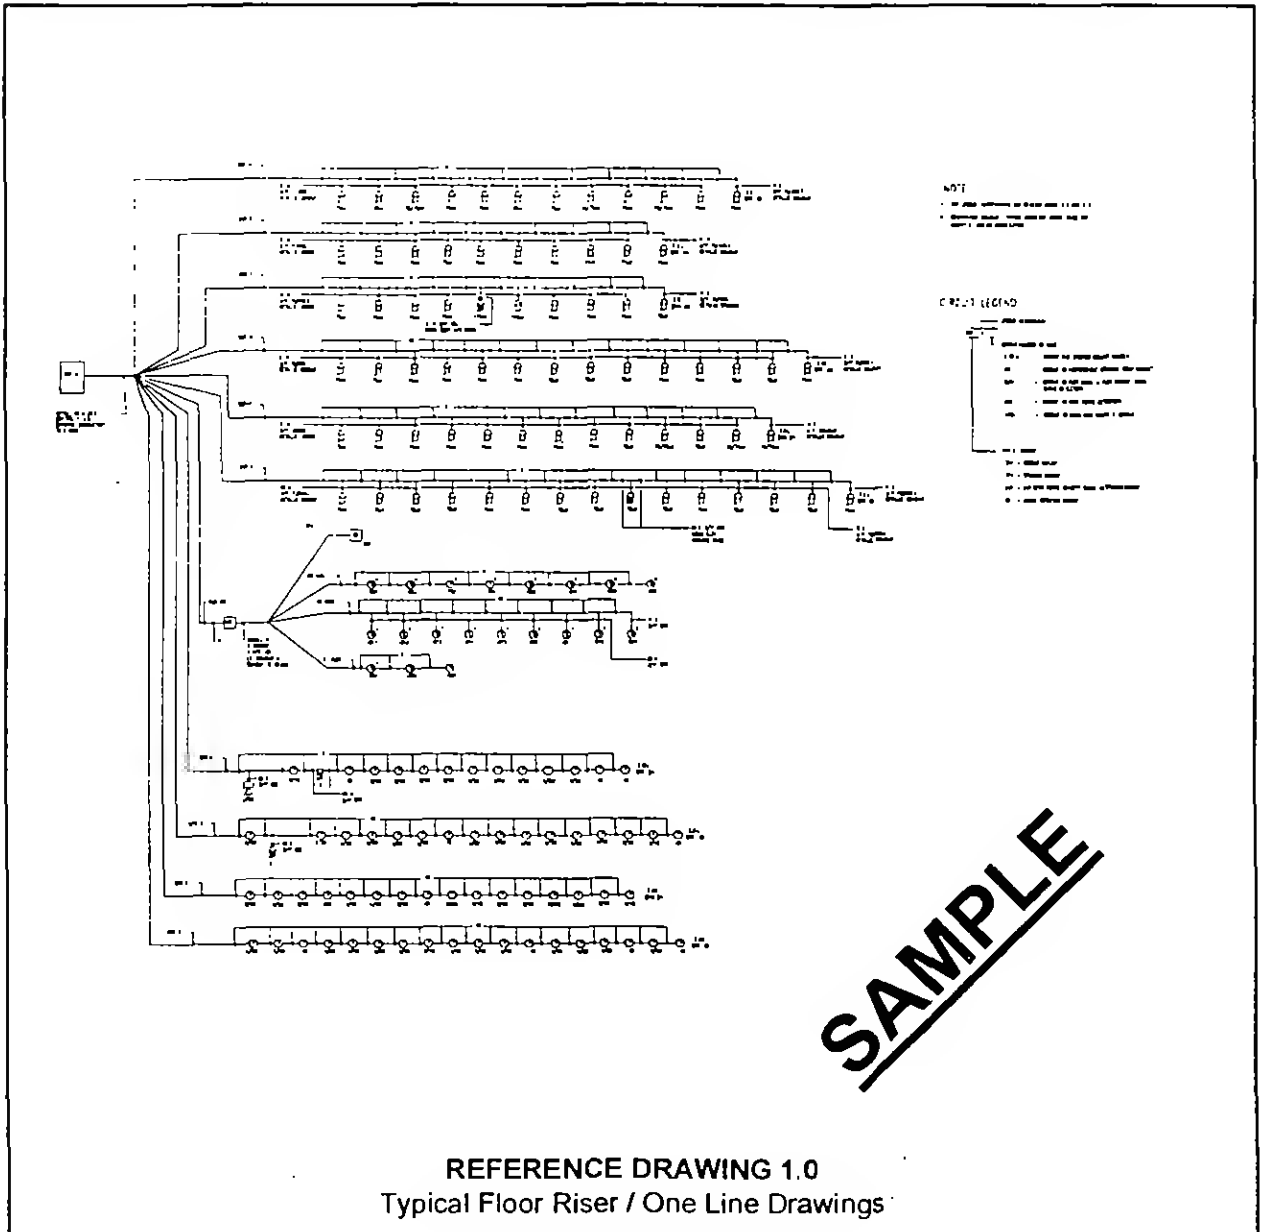


System Design - Fire Detection & Interface Devices

All Base Building Fire Detection Devices and Interface Devices are wired into the respective ALD circuit provided from the ATC Cabinet located in the Fire Sprinkler Closet (SC) found on each floor.


ALD circuits must be 14 AWG, Shielded Twisted Pair 150C Teflon Cable Assemblies. Wiring is run in a "Daisy Chain" fashion. T-Taps are not permitted. (55) Device addresses are preallocated for each floor. Device addresses are provided & coordinated by the Port Authority. All Devices must be selected from and used in accordance with the approved equipment list (Page- 14).

BBFAS Fire Detection Devices (FP-11 Smoke Detectors) must be installed in each Elevator Lobby, Electrical, Telephone and Fire Alarm Transponder Closet, and HVAC Air Returns. BBFAS Interface Devices (TRI-B6D) must be installed to monitor each tenant owned subsystem installed. Tenant FA (Fire Alarm) Subsystems must be monitored for a General Alarm Condition per Floor Served, and a General Trouble for each Subsystem Panel. Tenant PA (Preaction) Subsystems must be monitored for a Smoke Detection Alarm Condition per Floor Served, a Waterflow Alarm Condition for each Floor Served, a General Trouble and Supervisory Condition for each Subsystem Panel. All input contacts from the Tenant Subsystem to the TRI must be Dedicated Normally Open Type with No Voltage Present.


The sample reference drawings shown can be found in B Size (11 x 17) in the rear of this manual

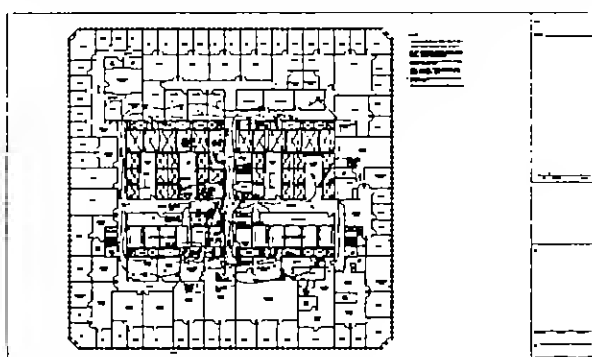


REFERENCE DRAWING 2.0
Typical Device Design Layout

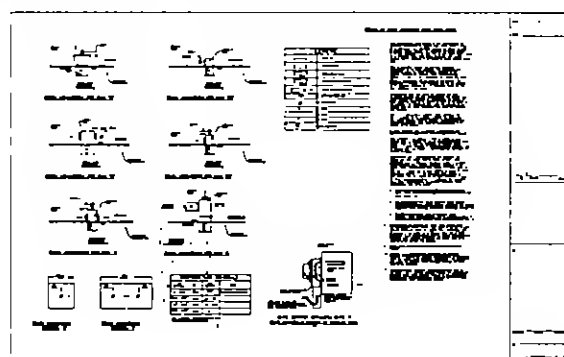

REFERENCE DRAWING 3.0
Typical Device Installation Details
Return Air Location

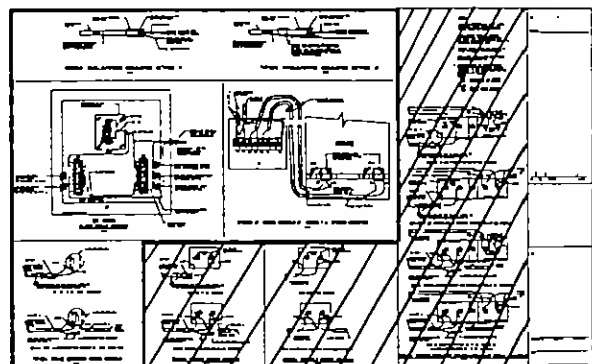

REFERENCE DRAWING 4.0
Typical Device Wiring Details

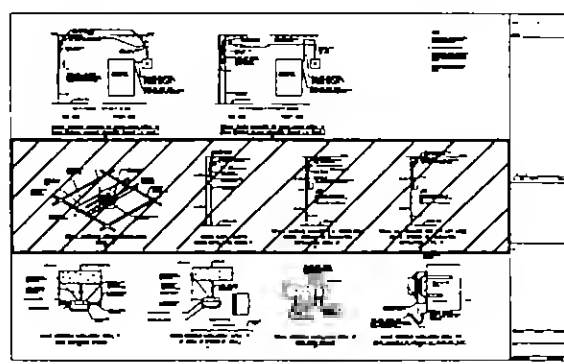

REFERENCE DRAWING 5.0
Typical Device Installation Details
Open Air Location

System Design - Visual Appliances - Strobes

All Base Building Visual Notification Appliances (Strobes) are wired into the respective STR circuit provided from the TSC Cabinet located in the Fire Alarm (FC) or Sprinkler Closet (SC) found on each floor.


STR circuits must be minimum 14 AWG, Shielded Twisted Pair 150C Teflon Cable Assemblies. Wiring is run in a "Daisy Chain" fashion in compliance with the building routing standard for STR Circuits. T-Taps are not permitted. (6) Circuits are provided for each floor. Each circuit is rated for a maximum load of 1.5 Amps @ 24VDC and a Maximum Combined Load of 7.2 Amps for all (6) Circuits. Wiring must be sized to minimize voltage drop. Circuit Resistance must not exceed 3.0 Ohms per Circuit. These values must not be exceeded, exceptions will not be allowed. Balancing is not required. All Appliances must be selected from and used in accordance with the approved equipment list (Page- 14).

The Engineer is responsible to field survey existing conditions & circuit use.


BBFAS Visual Notification Appliances (Strobes) must be installed in compliance with Applicable Codes and Standards. The Engineer is solely responsibility to determine, design and verify the requirements of visual notification appliance use, placement, intensity, etc. This document is not intended to provide guidance regarding visual performance requirements.

The Engineer shall provide a Strobe Circuit>Loading Table on Each Drawing.


The sample reference drawings shown can be found in B Size (11 x 17) in the rear of this manual

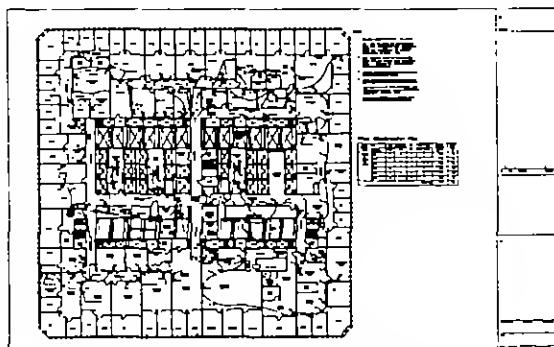

REFERENCE DRAWING 7.0
Typical Strobe Design Layout

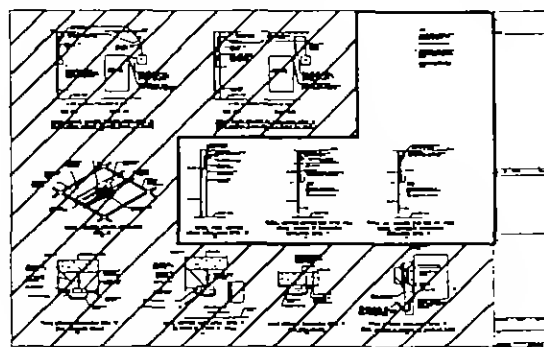

REFERENCE DRAWING 5.0
Typical Strobe Installation Details

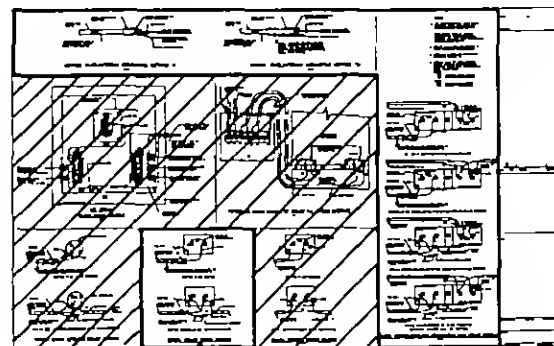

REFERENCE DRAWING 4.0
Typical Strobe Wiring Details

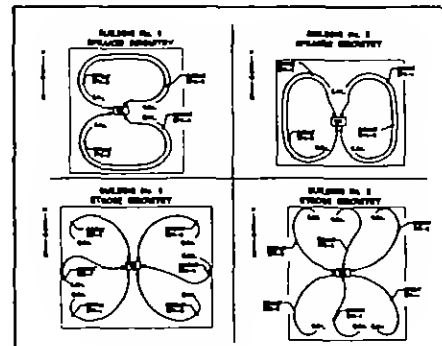


FIGURE 5
Typical Circuit Routing Detail

System Design - Audible Appliances - Speakers

All Base Building Audible Notification Appliances (Speakers) are wired into the respective SPK circuit provided from the TSC Cabinet located in the Fire Alarm (FC) or Sprinkler Closet (SC) found on each floor.


SPK circuits must be minimum 14 AWG. Unshielded Twisted Pair 150C Teflon Cable Assemblies. Wiring is run in a "Daisy Chain" fashion in compliance with the building routing standard for SPK Circuits. T-Taps are not permitted. (4) Circuits are provided for each floor. Each circuit is rated for a maximum load of 25 Watts @ 70.7 VRMS and a Maximum Combined Load of 25 Watts for all (4) Circuits. Wiring must be sized to minimize voltage drop. Circuit Impedance must not exceed 6.5 Ohms per Circuit. These values must not be exceeded, exceptions will not be allowed. Balancing is not required. All Appliances must be selected from and used in accordance with the approved equipment list (Page- 14).

The Engineer is responsible to field survey existing conditions & circuit use.


BBFAS Audible Notification Appliances (Speakers) must be installed in compliance with Applicable Codes and Standards. The Engineer is solely responsible to determine, design and verify the requirements of Audible notification appliance use, placement, audibility, etc. This document is not intended to provide guidance regarding Audible performance requirements.

The Engineer shall provide a Speaker Circuit/Loading Table on Each Drawing.


The sample reference drawings shown can be found in B Size (11 x 17) in the rear of this manual

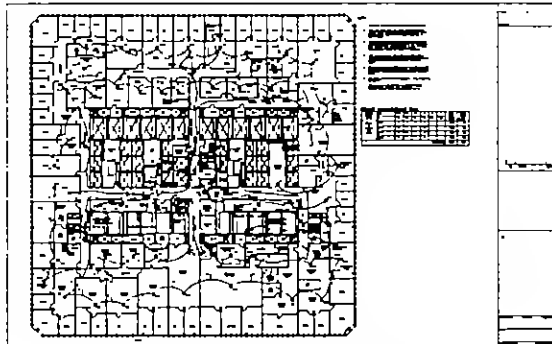

REFERENCE DRAWING 8.0
Typical Speaker Design Layout

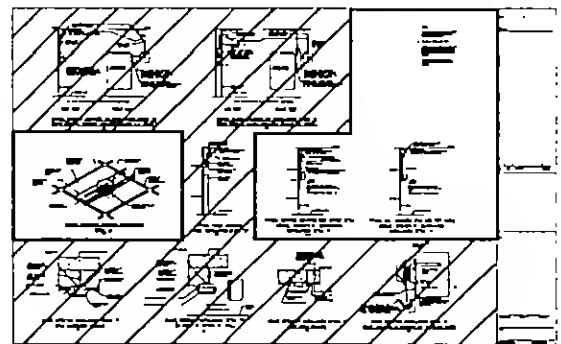

REFERENCE DRAWING 5.0
Typical Installation Details

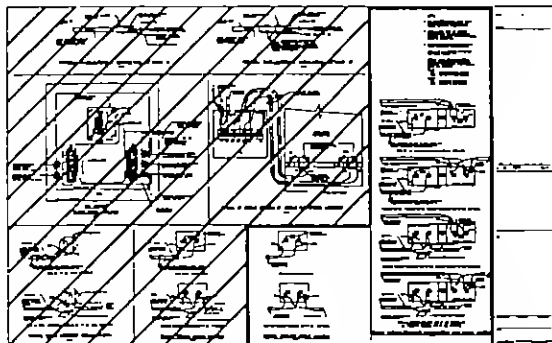

REFERENCE DRAWING 4.0
Typical Speaker Wiring Details

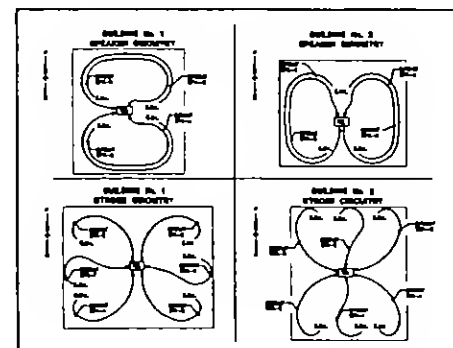


FIGURE 5
Typical Circuit Routing Detail

System Design - Circuit Performance Criteria Summary

Initiating Device Circuits - Addressable - ALD - (Page 6)

Nominal Circuit Voltage	20 VDC - Operating
Max Circuit Impedence	100 Ohm TSC to Last Device
Max Circuit Capacitance	.05 Mfd / Red to Black - TSC to Last Device on Circuit
Min Circuit Insulation Resistance	2 M Ohms / Red to Black, Red to Ground, Black to Ground Red to Shield, Black to Shield, Shield to Ground
Max Circuit Load	55 Addresses
Max Total Load Floor	55 Addresses
Wiring	Min. 14/2 Shielded Twisted Pair 200C Teflon
Wiring	Max. 12/2 Shielded Twisted Pair 200C Teflon
Max. Circuits per Floor	(1) - All Devices
Configuration	Breakout branch circuit taps at ATC Cabinet
Configuration	(1) (HVAC) - HVAC Detector Ckt (1) (Area) - Telephone, Electric and Fire Alarm Transponder Closet Detector Ckt (1) (ELV) - Elevator Lobby Detector Ckt (1) (TEN1) - Tenant Subpanel TRI Interface Ckt
System Connection Point	(1) (TEN2) - Tenant Subpanel TRI Interface Ckt ATC Cabinet - Center Corridor - SC Closet

Notification Appliance Circuits - Strobes - (Page 7)

Nominal Circuit Voltage	24 VDC - Operating
Max Circuit Resistance	3.0 Ohm TSC to Last Appliance on Circuit
Max Circuit Capacitance	.05 Mfd / Red to Black - TSC to Last Appliance on Circuit
Min Circuit Insulation Resistance	2 M Ohms / Red to Black, Red to Ground, Black to Ground Red to Shield, Black to Shield, Shield to Ground
Max Circuit Load	1.5 Amps - Sum of All Strobe load on Circuit
Max Total Load Floor	7.2 Amps - Sum of All Strobes load on ALL (6) circuits
Wiring	Min. 14/2 Shielded Twisted Pair 200C Teflon
Wiring	Max. 12/2 Shielded Twisted Pair 200C Teflon
Max. Circuits per Floor	(6) - Tenant & Common Spaces
Configuration	Circuits (A,B,C,D,E,F) - Tenant & Common Spaces.
System Connection Point	TSC Terminal Cabinet - Center Corridor - FC or SC Closet

Notification Appliance Circuits - Speakers - (Page 8)

Nominal Circuit Voltage	70.7VRMS - Operating
Max Circuit Impedence	6.5 Ohm TSC to Last Appliance on Circuit
Max Circuit Capacitance	.05 Mfd / Red to Black - TSC to Last Appliance on Circuit
Min Circuit Insulation Resistance	2 M Ohms / Red to Black, Red to Ground, Black to Ground
Max Circuit Load	25 Watts - Sum of All Speaker Tap setting on Circuit
Max Total Load Floor	25 Watts - Sum of All Speaker Tap setting on ALL (4) circuits
Wiring	Min. 14/2 Unshielded Twisted Pair 200C Teflon
Wiring	Max. 12/2 Unshielded Twisted Pair 200C Teflon
Wiring	Daisy Chain Configuration - A/B Counter rotation - Routing Standard
Max. Circuits per Floor	(4) - Tenant & Common Spaces
Configuration	Circuits (A,B,C,D) - Tenant & Common Spaces.
System Connection Point	TSC Terminal Cabinet - Center Corridor - FC or SC Closet

System Design - Wiring - Acceptance Test - Wiring

This page describes the procedures that must be followed and the documentation that is required of all BBFAS wiring after rough in and preparation but prior to device & appliance installation and building tie-in.

All wiring must be thoroughly tested in accordance with the field wiring test procedure commonly referred to as "PA Attachment C". This procedural document outlines in detail all of the information required to conduct field testing of ALD, SPK & STR circuit wiring. The required forms are also included.

Upon completion and submittal the test results are reviewed and either approved or rejected. No connection of field wiring will be made to the BBFAS until such time as an approved copy of the test results is on file.

Final Tie-In of Field Wiring to the BBFAS is the exclusive domain of the Port Authority.

Listed below are sample resources in the form of sketches, drawing, list and details required for this work. They can be found in the back of this manual in A Size (8.5 x 11) format.

REFERENCE DOCUMENT 1
WTC "ATTACHMENT C"

REFERENCE DOCUMENT 2
WTC Wire Test Form
ALD Circuits

REFERENCE DOCUMENT 3
PA WTC Wire Test Form
Speaker Circuits

REFERENCE DOCUMENT 4
WTC Wire Test Form
Strobe Circuits

This page describes the Contractor Tie-In & Pretest Checklist. This Document is Required and must be submitted prior to the Connection/Tie-In and Pre Testing of Devices, Appliances and Interfaces requiring connection to the BBFAS.

✕

The Port Authority of NY & NJ	WTC BASE BUILDING FIRE ALARM SYSTEM CONTRACTOR TIE-IN & PRE-TEST CHECKLIST	Electrical Operations and Maintenance
----------------------------------	---	--

This checklist is designed to assist the CONTRACTOR, to reduce construction delays, coordinate toward occupancy
 increase productivity and reduce delivered costs. The items listed are required to be completed prior to
 the scheduling of the WTC Base Building Fire Alarm System Tie-In and Pre-Testing.

Please direct all scheduling and technical requests to Mr. Ray Stevens, at 212-436-6666
 2-11-98 24 Hour Advance Notice Required Prior to Tie-In and Pre-Testing Scheduling 000000

1. TENANT Name _____ (PRINT)
2. BLDG Location 1WTC 2 WTC 3WTC 4WTC CONCOURSE SUBGRADE (CIRCLE)
3. BLDG Floor _____ (PRINT)
4. CONTRACTOR Name _____ (PRINT)

5. Wire Test Results - Submitted, Corrected as Required and Approved [] Completed [] Not Applicable
6. Speaker/Stroke Wiring in TSC ALD Wiring in ATC Ready for Tie-In [] Completed [] Not Applicable
7. Speakers out at selected power levels and installed
(Power setting in Watts, per Design) [] Completed [] Not Applicable
8. Strobes match selected power levels and installed
(Power setting in Candelas, per Design) [] Completed [] Not Applicable
9. Smoke Detectors programmed, labeled and installed. [] Completed [] Not Applicable
10. TRU interfaces programmed, labeled and installed. [] Completed [] Not Applicable
11. Waterflow and Temp Devices installed and Operational. [] Completed [] Not Applicable
12. Tenant SubSystem(s) installed and Operational. [] Completed [] Not Applicable
13. Fire Alarm Drawings - As installed including all Changes
(2 Sets - Submitted in Advance to PA O&M Electrical Supervisor) [] Completed [] Not Applicable
14. Architect, Engineer, and General Contractor review with Status [] Completed [] Not Applicable

15. I certify that the WTC Base Building Fire Alarm Work required for the referenced
 Tenant Project has been completed in its entirety conforming with the Plans and
 Specifications submitted and Released, and I am ready for the System Pretest.

FAX COMPLETED FORM TO:
 Mr. Ray Stevens@
 WTC O&M - Electrical
 1-212-436-6717

16. Signed _____
17. Date _____

8/20/98 WTC Rev. 8/21/98

The Port Authority of NY & NJ	WTC BASE BUILDING / FIRE ALARM SYSTEM CONTRACTOR TIE-IN & PRE-TEST CHECKLIST	Electrical Operations and Maintenance
<p>This checklist is designed to ensure the CONTRACTOR, to reduce construction delays, concentrate toward decreasing increase productivity and reduce delivered costs. The items listed are required to be completed prior to the scheduling of the WTC Base Building Fire Alarm System Tie-in and Pre-Testing.</p> <p>Please direct completed forms, scheduling and technical requests to Mr. Ray Stenness, at 212-436-8006</p> <p style="text-align: center;">***** 34 Days Advance Notice Required Prior to Tie-in and Pre-Testing Scheduling *****</p>		
1. TENANT Name _____	(PRINT)	
2. BLDG Location _____	(CIRCLE)	
3. BLDG Floor _____	(PRINT)	
4. CONTRACTOR Name _____	(PRINT)	
5. Wire Test Results - Submitted, Corrected as Required and Approved	<input type="checkbox"/> [Completed] <input type="checkbox"/> [Not Applicable]	
6. Speaker/Strike Wiring in TEC, ALD Wiring in ATC Ready for Tie-In	<input type="checkbox"/> [Completed] <input type="checkbox"/> [Not Applicable]	
7. Speakers set at selected power levels and installed (Power setting in Walls, per Drawing)	<input type="checkbox"/> [Completed] <input type="checkbox"/> [Not Applicable]	
8. Strobes match selected power levels and installed (Power setting in Control, per Drawing)	<input type="checkbox"/> [Completed] <input type="checkbox"/> [Not Applicable]	
9. Smoke Detectors programmed, labeled and installed.	<input type="checkbox"/> [Completed] <input type="checkbox"/> [Not Applicable]	
10. TRU interfaces programmed, labeled and installed.	<input type="checkbox"/> [Completed] <input type="checkbox"/> [Not Applicable]	
11. Waterline and Tamper Devices installed and Operational.	<input type="checkbox"/> [Completed] <input type="checkbox"/> [Not Applicable]	
12. Tensec SubSystem(s) installed and Operational.	<input type="checkbox"/> [Completed] <input type="checkbox"/> [Not Applicable]	
13. Fire Alarm Drawings - As Installed including all Changes (7 Sets - Submitted in Advance to PA O&M Electrical Supervisor)	<input type="checkbox"/> [Completed] <input type="checkbox"/> [Not Applicable]	
14. Architect, Engineer, and General Contractor concur with Status	<input type="checkbox"/> [Completed] <input type="checkbox"/> [Not Applicable]	
<p>15. I certify that the WTC Base Building Fire Alarm Work required for the aforementioned Tenant Project has been completed in the entirety set forth with the Plans and Specifications submitted and Reviewed, and I am ready for the System Pretest.</p>		
<div style="border: 1px solid black; padding: 5px; display: inline-block;"> FAX COMPLETED FORMS TO: Mr. Ray Stenness WTC O&M - Electrical 1-212-436-6717 </div>		
16. Signed _____		
17. Date _____		

REFERENCE DOCUMENT 5
CONTRACTOR TIE-IN & PRETEST CHECKLIST

System Design - Acceptance Tests - Devices, Appliances & Interface

This page describes the procedures that must be followed and the documentation that is required of all BBFAS Devices, Appliances & Interfaces after Tie-In to the BBFAS prior to the Final Inspection.

All Devices, Appliances and Interfaces must be 100% tested including but not limited to Function Testing of Elevator Recall, Fan Shutdown, etc. Final Inspection and Occupancy will not be permitted until all Acceptance Testing has been completed and approved by the Port Authority. The Engineer must allow for these tests and any retesting required as part of this project. All BBFAS test reports and the actual acceptance tests will be conducted by the Port Authority and it's BBFAS Contractor. It is highly recommended that the Engineer & Contractor be present during these tests.

The Test Report reference documents furnished below are provided to familiarize the Engineer with the substance of a Typical Test Report. These documents are not intended for incorporation into the design documents.

FIGURE 6
 Typical ALD Device Test Report

FIGURE 7
 Typical NAC Appliance Test Report

System Design - Summary

This Page is the Summary of the preceeding 12 pages contained in this Guidelines Manual.

The manual has been organized in a step be step manner from System Introduction, through the Design process and ending with Acceptance Testing. Furthermore, the manual is not intended to replace the design skills required of a qualified Professional Engineer to produce an Engineered Fire Alarm System but instead familiarize the Engineer with the requirements and features of the World Trade Center BBFAS.

Listed below are the steps, in order, involved with the design, installation, testing and acceptance process.

<u>Item</u>	<u>Description</u>
1)	Design TAA/Tenant Floor Devices, Appliances and Interfaces.
2)	Design Submission and Review by Port Authority.
3)	Comments and Revisions
4)	Final Drawing Approval.
5)	Construction Approval
6)	Installation of Rough Wiring.
7)	Acceptance Testing of Rough Wiring.
8)	Installation of Devices, Appliances and Interfaces.
9)	Completion and Submission of Contractor Tie-In/Pretest Documents
10)	Tie-In of Devices, Appliances and Interfaces.
11)	Pre-Test of Devices, Appliances and Interfaces.
12)	Ready for Final/Controlled Inspection.
13)	Issue As-Built Record Drawings.
14)	Project Close Out.

Notes on the Use of Reference Materials provided in this Manual.

FIGURES-	FOR INFORMATION ONLY for purposes of Illustration.
DOCUMENTS-	REQUIRED as part of the TAA Construction Package.
DRAWINGS-	REQUIRED as part of the TAA Design Package.

PA Attachment "A"

Sheet 1

Notification Appliances

Model #	Part #	Description	Special Modifications/Comments	Color	Usage	
E-70R	Wheelock	70.7 V - 1/8-2W Speaker-Square-Wall	CPY/UL Compatibility Accepted - WTC BBFAS Only (1,2)	Red	PA Specified	
ET70-R	Wheelock	70.7 V - 1/8-8W Speaker-Square-Wall	CPY/UL Compatibility Accepted - WTC BBFAS Only (1,2)	Red	PA Specified	
E90-W	Wheelock	70.7 V - 1/8-2W Speaker-Round-Ceiling	CPY/UL Compatibility Accepted - WTC BBFAS Only (1,2)	White	PA Specified	
ET90-W	Wheelock	70.7 V - 1/8-8W Speaker-Round-Ceiling	CPY/UL Compatibility Accepted - WTC BBFAS Only (1,2)	White	PA Specified	
RSS-2415W-FR	Wheelock	24VDC - Non Sync & Sync - 15 cd Strobe -Wall	CPY/UL Compatibility Accepted - WTC BBFAS Only (1,2)	Red	PA Specified	
RSS-241575W-FR	Wheelock	24VDC - Non Sync & Sync - 15/75 cd Strobe -Wall	CPY/UL Compatibility Accepted - WTC BBFAS Only (1,2)	Red	PA Specified	
RSS-2430W-FR	Wheelock	24VDC - Non Sync & Sync - 30 cd Strobe -Wall	CPY/UL Compatibility Accepted - WTC BBFAS Only (1,2)	Red	PA Specified	
RSS-2475W-FR	Wheelock	24VDC - Non Sync & Sync - 75 cd Strobe -Wall	CPY/UL Compatibility Accepted - WTC BBFAS Only (1,2)	Red	PA Specified	
RSS-24110W-FR	Wheelock	24VDC - Non Sync & Sync - 110 cd Strobe -Wall	CPY/UL Compatibility Accepted - WTC BBFAS Only (1,2)	Red	PA Specified	
E70-2415W-FR	Wheelock	70.7 V - 1/8-2W Speaker / 24VDC - Non Sync & Sync - 15 cd Strobe - Wall (3)	CPY/UL Compatibility Accepted - WTC BBFAS Only (1,2)	Red	PA Specified	
E70-241575W-FR	Wheelock	70.7 V - 1/8-2W Speaker / 24VDC - Non Sync & Sync - 15/75 cd Strobe - Wall (3)	CPY/UL Compatibility Accepted - WTC BBFAS Only (1,2)	Red	PA Specified	
E70-2430W-FR	Wheelock	70.7 V - 1/8-2W Speaker / 24VDC - Non Sync & Sync - 30 cd Strobe - Wall (3)	CPY/UL Compatibility Accepted - WTC BBFAS Only (1,2)	Red	PA Specified	
E70-2475W-FR	Wheelock	70.7 V - 1/8-2W Speaker / 24VDC - Non Sync & Sync - 75 cd Strobe - Wall (3)	CPY/UL Compatibility Accepted - WTC BBFAS Only (1,2)	Red	PA Specified	
E70-24110W-FR	Wheelock	70.7 V - 1/8-2W Speaker / 24VDC - Non Sync & Sync - 110 cd Strobe - Wall (3)	CPY/UL Compatibility Accepted - WTC BBFAS Only (1,2)	Red	PA Specified	
ET70-2415W-FR	Wheelock	70.7 V - 1/8-8W Speaker / 24VDC - Non Sync & Sync - 15 cd Strobe - Wall (3)	CPY/UL Compatibility Accepted - WTC BBFAS Only (1,2)	Red	PA Specified	
ET70-241575W-FR	Wheelock	70.7 V - 1/8-8W Speaker / 24VDC - Non Sync & Sync - 15/75 cd Strobe - Wall (3)	CPY/UL Compatibility Accepted - WTC BBFAS Only (1,2)	Red	PA Specified	
ET70-2430W-FR	Wheelock	70.7 V - 1/8-8W Speaker / 24VDC - Non Sync & Sync - 30 cd Strobe - Wall (3)	CPY/UL Compatibility Accepted - WTC BBFAS Only (1,2)	Red	PA Specified	
ET70-2475W-FR	Wheelock	70.7 V - 1/8-8W Speaker / 24VDC - Non Sync & Sync - 75 cd Strobe - Wall (3)	CPY/UL Compatibility Accepted - WTC BBFAS Only (1,2)	Red	PA Specified	
RSSP-24110W-FR	Wheelock	24VDC - Non Sync & Sync - 110 cd Strobe - Retro Plata - Wall (3)	CPY/UL Compatibility Accepted - WTC BBFAS Only (1,2)	Red	PA Specified	
		use w/ E70-R or ET70-R Speakers				
BB	Wheelock	Backbox	CPY/UL Compatibility Accepted - WTC BBFAS Only (1,2)		PA Specified	
DBB	Wheelock	Backbox	CPY/UL Compatibility Accepted - WTC BBFAS Only (1,2)		PA Specified	
SBB	Wheelock	Backbox	CPY/UL Compatibility Accepted - WTC BBFAS Only (1,2)		PA Specified	
SHBB	Wheelock	Backbox	CPY/UL Compatibility Accepted - WTC BBFAS Only (1,2)		PA Specified	
SBL-2	Wheelock	Backbox	CPY/UL Compatibility Accepted - WTC BBFAS Only (1,2)		PA Specified	
WBB	Wheelock	Backbox - Weather Resistant	CPY/UL Compatibility Accepted - WTC BBFAS Only (1,2)		PA Specified	
ISP	Wheelock	Surface Adapter	CPY/UL Compatibility Accepted - WTC BBFAS Only (1,2)		PA Specified	
RP-R	Wheelock	Retrofit Adapter	CPY/UL Compatibility Accepted - WTC BBFAS Only (1,2)		PA Specified	
SSB-4	Wheelock	Ceiling Support Bodge	CPY/UL Compatibility Accepted - WTC BBFAS Only (1,2)		PA Specified	

Cerberus Pyrotechnics
Special Projects Group
World Trade Center
Base Bldg Fire Alarm System
Equipment Schedule

Attachment "A"


Sheet 2

Initiating Devices


J. Drucker - CPY
Last Rev: 7/21/98
Rev. 1

Model #	Part #	Description	Special Modifications/Comments	Color	Usage
ILI-1	500-092725	Open Area Smoke Detector - Ionization - 0-300 Fpm	For Open Area Use Only - Spot Applications	White	Designs Prior to Jan 1 98
ILI-1A	500-093023	Open Area Smoke Detector - Ionization - High Velocity 0-1200 Fpm	For Open Area Use Only - Spot Applications	White	Designs Prior to Jan 1 98
ILI-1B	500-093026	Duct Smoke Detector Only - Ionization - High Velocity 500-4000 Fpm	For Use w/ AD-3I Duct Housing Only	White	Designs Prior to Jan 1 98
DB-3S	595-381804	Open Area Detector Mounting Base	For Use w/ ILI-1 & ILI-1A Smoke Detectors	White	Designs Prior to Jan 1 98
AD-3I	500-086495	Duct Housing for ILI-1B Smoke Detector	For Use w/ ILI-1B Smoke Detector Only	Black	Designs Prior to Jan 1 98
ILP-2	500-095026	Open Area Smoke Detector - Photo - FirePrint	Application Specific Detection	White	EMR/MGR Areas
DB-3S	595-381804	Open Area Detector Mounting Base	For Use w/ ILP-2 Smoke Detectors	White	EMR/MGR Areas
FP-11	500-095112	Open Area Smoke Detector - Photo/Thermal - FirePrint	Application Specific Detection	White	All Other Applications
DB-11	500-094151	Open Area Detector Mounting Base	For Use w/ FP-11 Smoke Detector Only	White	All Other Applications
AD-11P	500-095656	Duct Housing for FP-11 Smoke Detector	For Use w/ FP-11 Smoke Detector Only	Black	All Other Applications
STA-2	500-684360	Sampling Tube - One required for each Duct Housing	9" - 1'9" Width Ducts	Metallic	All Duct SD Apps
STA-3	500-684361	Sampling Tube - One required for each Duct Housing	1'-9" - 3'3" Duct Widths	Metallic	All Duct SD Apps
STA-6	500-684362	Sampling Tube - One required for each Duct Housing	3'-3" - 6'-3" Duct Widths	Metallic	All Duct SD Apps
STA-10	500-684363	Sampling Tube - One required for each Duct Housing	6'-3" - 9'9" Duct Widths	Metallic	All Duct SD Apps
TRI-B6	500-891870	Single Dry Contact Input Only (1) Address	3 1/2" Double Gang Deep Box Mtg.	Metallic	All
TRI-B6D	500-891871	Dual Dry Contact Input Only (2) Address	3 1/2" Double Gang Deep Box Mtg.	Metallic	All
TRI-60R	500-891872	Single Dry Contact Input w/ 1Amp (L)/ 2 Amp (R) Form C Relay (1) Address	3 1/2" Double Gang Deep Box Mtg.	Metallic	All
MSI-CS2	-----	Pull Station - Metal - Single Action - White Strip (PA Supplied)	Special Order	Red	BBFAS Use Only
MS-DA	-----	Double Action Adapter for MSI-CS2 Pull Station (PA Supplied)	Special Order	Black	BBFAS Use Only


**NORTH TOWER (NT) - 1 WTC
SPEAKER CIRCUITING**

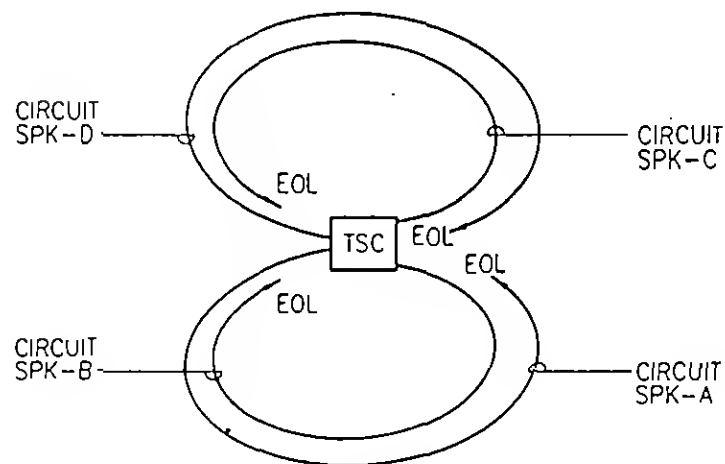


**SOUTH TOWER (ST) - 2 WTC
SPEAKER CIRCUITING**

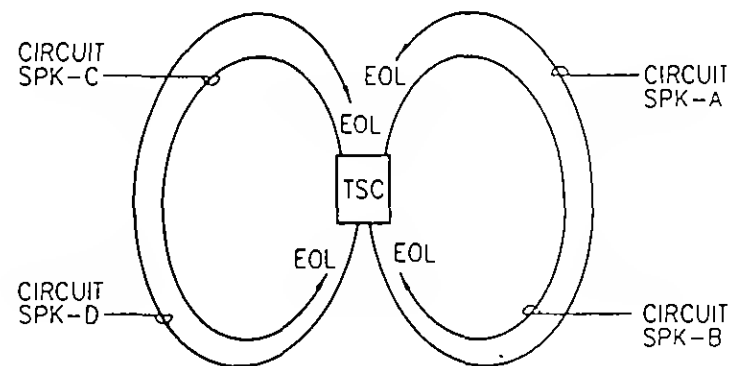

**NORTH TOWER (NT) - 1 WTC
STROBE CIRCUITING**

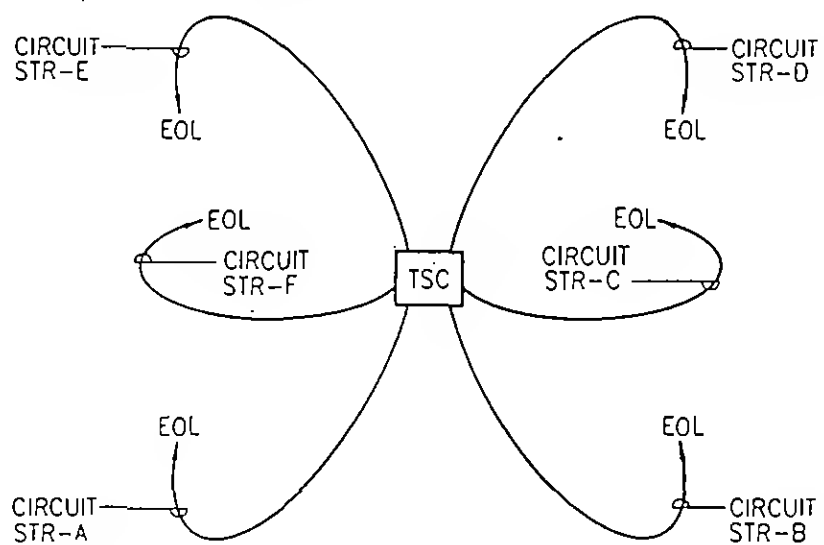

**SOUTH TOWER (ST) - 2 WTC
STROBE CIRCUITING**

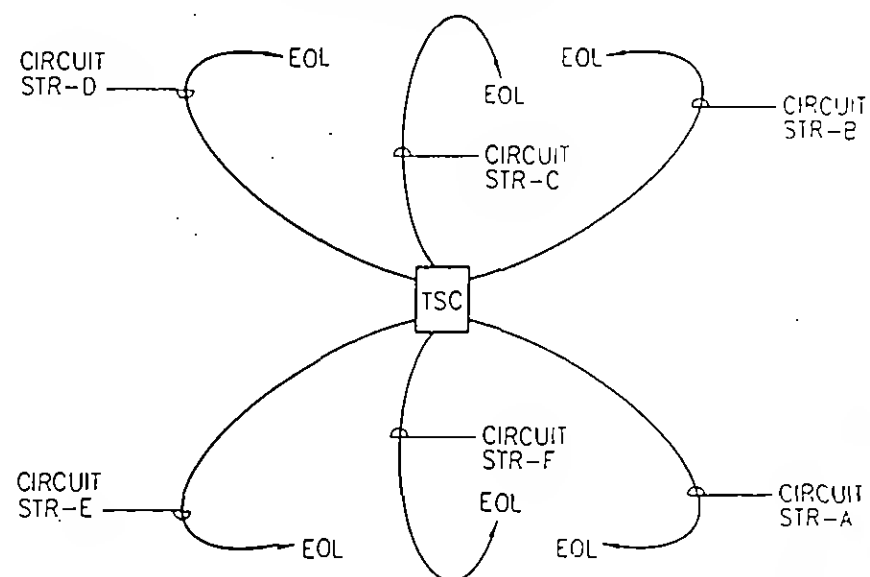

STANDARDIZED TEST REPORT

36222

Job WTC - Fire Alarm Upgrade Loc WTC - North Tower NT63				Test Date Fri. Feb.19,1999		Test Tech CP-12/CP-19					
Line No.	Device Address	Device Location	Device Type	Device ID	Test Type	Monitor Integrity	Alarm Operation	Trouble Operation	Duct Vel. Reading	Function Operation	Comments
1	005-062-007	NT63 FELV 50 CAR LOBBY BBSD	SD	FP-11	Acceptance	P F	P F	NA	NA	P F	Function Test- Recall Freight Elevator Car 50
2	005-062-008	NT63 FELV 17/49 CAR LOBBY BBSD	SD	FP-11	Acceptance	P F	P F	NA	NA	P F	Function Test- Recall Freight Elevator Cars 17 and 49
3	005-062-009	NT63 PELV 63-68 CAR LOBBY BBSD	SD	FP-11	Acceptance	P F	P F	NA	NA	P F	Function Test- Recall Passenger Elevator Cars 63-68
4	005-062-011	NT63 FIRE ALARM CLOSET BBSD	SD	FP-11	Acceptance	P F	P F	NA	NA	NA	
5	005-062-012	NT63 TELEPHONE CLOSET SW BBSD	SD	FP-11	Acceptance	P F	P F	NA	NA	NA	
6	005-062-013	NT63 ELECTRIC CLOSET S BBSD	SD	FP-11	Acceptance	P F	P F	NA	NA	NA	
7	005-062-014	NT63 TELEPHONE CLOSET SE BBSD	SD	FP-11	Acceptance	P F	P F	NA	NA	NA	
8	005-062-015	NT63 ELECTRIC CLOSET CORE BBSD	SD	FP-11	Acceptance	P F	P F	NA	NA	NA	
9	005-062-016	NT63 TELEPHONE CLOSET NE BBSD	SD	FP-11	Acceptance	P F	P F	NA	NA	NA	
10	005-062-017	NT63 ELECTRIC CLOSET N BBSD	SD	FP-11	Acceptance	P F	P F	NA	NA	NA	
11	005-062-018	NT63 TELEPHONE CLOSET NW BBSD	SD	FP-11	Acceptance	P F	P F	NA	NA	NA	
12	005-062-044	NT63 PLENUM SW BBSD	SD	FP-11	Acceptance	P F	P F	NA	NA	NA	
13	005-062-045	NT63 PLENUM SW BBSD	SD	FP-11	Acceptance	P F	P F	NA	NA	NA	
14	005-062-046	NT63 PLENUM NW BBSD	SD	FP-11	Acceptance	P F	P F	NA	NA	NA	
15	005-062-047	NT63 PLENUM NW BBSD	SD	FP-11	Acceptance	P F	P F	NA	NA	NA	
16	005-062-048	NT63 PLENUM NW BBSD	SD	FP-11	Acceptance	P F	P F	NA	NA	NA	
17	005-062-049	NT63 PLENUM NE BBSD	SD	FP-11	Acceptance	P F	P F	NA	NA	NA	
18	005-062-050	NT63 PLENUM NE BBSD	SD	FP-11	Acceptance	P F	P F	NA	NA	NA	
19	005-062-051	NT63 PLENUM NE BBSD	SD	FP-11	Acceptance	P F	P F	NA	NA	NA	
20	005-062-052	NT63 PLENUM SE BBSD	SD	FP-11	Acceptance	P F	P F	NA	NA	NA	

FIGURE-6

36222

**Test
Tech**

FIGURE-7

ATTACHMENT "C"PORT AUTHORITY OF NY & NJ

FIRE ALARM SYSTEM

FIRE ALARM SPEAKER, STROBE AND ALD LOOP

FIELD TESTING

REQUIRED
Approval Required prior
to WTC Base Building
System Connection.PART 1 - GENERAL

1.01 SUMMARY

The following parameters apply to field wiring (installed by the Contractor), connected to the new Pyrotronics MXLV Fire Alarm (F.A.) System. It is important to note that in certain cases, project engineering specifications have exceeded the minimum requirements stated in the MXLV-IOM manual. With this fact in mind, the manual should be consulted as a reference document only.

1.02 REFERENCES

The following is a list of references in this section:

- New York City Electrical Code.

New York City Building Code.

Cerberus Pyrotronics MXLV-IOM Manual.

1.03 SCOPE OF WORK

- A. After installation, perform the tests as outlined in part 2 of this specification, under the direction of the Maintenance Supervisor.
- B. A copy of all test result reports, together with an outline of the test method used, shall be submitted to the Maintenance Supervisor for review.
- C. Should any of the test results reveal defects, promptly correct such defects, and rerun the test until the entire installation is satisfactory to the Maintenance Supervisor.
- D. All test results shall be recorded and submitted on test result reports. See attached samples.

Part 2 - FIELD TESTS

2.01 SPEAKER WIRING

A. GENERAL

1. Speaker Wiring Circuits.
 - a. Speaker circuit "A" - 1 pair.
 - b. Speaker circuit "B" - 1 pair.

B. SEQUENTIAL TEST PROCEDURES

1. Install all field wiring (including stripping of the cable jacket and conductor insulation), heat shrinking and labeling. No connections to be made.
2. Visually inspect cables for physical damage and proper connection, in accordance with the Contract Drawings.
3. "Ring out" all circuits to verify continuity, proper markings and location.
4. Splice through all open connections (except the homerun to TSC, and last device cable end), using a temporary "wire-nut" approved by the Engineer.
5. Perform insulation resistance and stray voltage tests.
6. Apply a short between the red and the black conductors at the last device cable end, using a temporary "wire-nut" approved by the Engineer and perform resistance test.
7. After all testing, remove temporary "wire-nuts" and connect speakers and end of line resistors (E.O.L.).

C. EXECUTION

1. General
 - a. **Wiring shall be checked and tested by the Contractor, in accordance with this procedure, to ensure that the system is free of shorts, open and ground faults.**
 - b. A copy of all test reports shall be submitted to the Maintenance Supervisor for approval.
2. Test performance
 - a. **Insulation resistance - Test all wires and cables installed under this contract (and as outlined below), with a 1000 Volt Megohmmeter (megger). Applied potential to be 1000 Volts DC for 1 minute.**

Red Conductor to Black Conductor: _____ MΩ.

Red Conductor to Ground: _____ MΩ.

Black Conductor to Ground: _____ MΩ.

- b. Stray Voltage - Test all wires cables installed under this contract (and as outlined below), with the Fluke 87 Multimeter.

Red Conductor to Black Conductor: _____ AC Volts.

Red Conductor to Black Conductor: _____ DC Volts.

- c. Resistance - Test all wires and cables installed under this contract (and as outline below), with the Fluke 87 Multimeter.

Red Conductor to Black Conductor: _____ Ohms.

- d. A copy of all test results reports (see sample test results report), shall be submitted to the Maintenance Supervisor for approval.
- e. After all test result reports have been approved by the Maintenance Supervisor, contractor shall remove temporary test connections and connect all wiring as shown on the Contract Drawings.

2.02 STROBE WIRING

A. SEQUENTIAL TEST PROCEDURES

1. Install all field wiring (including stripping of the cable jacket and conductor insulation), heat shrinking and labeling. No connections to be made.
2. Visually inspect cables for physical damage and proper connection, in accordance with the Contract Drawings.
3. "Ring out" all circuits to verify continuity, proper markings and location.
4. Splice through all open connections (except the homerun to TSC, and last device cable end), using a temporary "wire-nut" approved by the Engineer.
5. Perform insulation resistance and stray voltage tests.
6. Apply a short between the red and the black conductors at the last device cable end, using a temporary "wire-nut" approved by the Engineer and perform resistance test.
7. After all testing, remove temporary "wire-nuts" and connect strobes and end of line resistors (E.O.L.).

B. EXECUTION

1. General

- a. Wiring shall be checked and tested by the Contractor, in accordance with this procedure, to ensure that the system is free of shorts, open and ground faults.

- b. A copy of all test reports shall be submitted to the Maintenance Supervisor for approval.

2. Test performance

- a. Insulation resistance - Test all wires and cables installed under this contract (and as outlined below), with a 1000 Volt Megohmmeter (megger). Applied potential to be 1000 Volts DC for 1 minute.

Red Conductor to Black Conductor: _____ MΩ.

Red Conductor to Ground: _____ MΩ.

Black Conductor to Ground: _____ MΩ.

Red Conductor to Shield: _____ MΩ.

Black Conductor to Shield: _____ MΩ.

Shield Conductor to Ground: _____ MΩ.

- b. Stray Voltage - Test all wires cables installed under this contract (and as outlined below), with the Fluke 87 Multimeter.

Red Conductor to Black Conductor: _____ AC Volts.

Red Conductor to Black Conductor: _____ DC Volts.

- c. Resistance - Test all wires and cables installed under this contract (and as outline below), with the Fluke 87 Multimeter.

Red Conductor to Black Conductor: _____ Ohms.

- d. A copy of all test results reports (see sample test results report), shall be submitted to the Maintenance Supervisor for approval.

- e. After all test result reports have been approved by the Maintenance Supervisor, contractor shall remove temporary test connections and connect all wiring as shown on the Contract Drawings.

2.03 ALD LOOP

A. SEQUENTIAL TEST PROCEDURES

1. Install all field wiring (including stripping of the cable jacket and conductor insulation), heat shrinking and labeling. No connections to be made.
2. Visually inspect cables for physical damage and proper connection, in accordance with the Contract Drawings.

3. "Ring out" all circuits to verify continuity, proper markings and location
4. Splice through all open connections (except the homerun to TSC, and last device cable end), using a temporary "wire-nut" approved by the Engineer.
5. Perform insulation resistance, stray voltage and capacitance tests.
6. Apply a short between the red and the black conductors at the last device cable end, using a temporary "wire-nut" approved by the Engineer and perform resistance test.
7. After all testing, remove temporary "wire-nuts" and connect ALD devices.

B. EXECUTION

1. General

- a. Wiring shall be checked and tested by the Contractor, in accordance with this procedure, to ensure that the system is free of shorts, open and ground faults.
- b. A copy of all test reports shall be submitted to the Maintenance Supervisor for approval.

2. Test performance

- a. Insulation resistance - Test all wires and cables installed under this contract (and as outlined below), with a 1000 Volt Megohmmeter (megger). Applied potential to be 1000 Volts DC for 1 minute.

Red Conductor to Black Conductor: _____ MΩ.

Red Conductor to Ground: _____ MΩ.

Black Conductor to Ground: _____ MΩ.

Red Conductor to Shield: _____ MΩ.

Black Conductor to Shield: _____ MΩ.

Shield Conductor to Ground: _____ MΩ.

- b. Stray Voltage - Test all wires cables installed under this contract (and as outlined below), with the Fluke 87 Multimeter.

Red Conductor to Black Conductor: _____ AC Volts.

Red Conductor to Black Conductor: _____ DC Volts.

- c. Capacitance - Test all wires and cables installed under this contract (and as outlined below), with the Fluke 87 Multimeter.

Red Conductor to Black Conductor: _____ μF .

Red Conductor to Shield: _____ μF .

Black Conductor to Shield: _____ μF .

- d. Resistance - Test all wires and cables installed under this contract (and as outline below), with the Fluke 87 Multimeter.

Red Conductor to Black Conductor: _____ Ohms.

- e. A copy of all test results reports (see sample test results report), shall be submitted to the Maintenance Supervisor for approval.
- f. After all test result reports have been approved by the Maintenance Supervisor, contractor shall remove temporary test connections and connect all wiring as shown on the Contract Drawings.

END OF SECTION

TENANT.DOC

BUILDING: 1WTC(NT) 2WTC(ST) 4WTC(SE) 5WTC(NE) CONCS(CS) SUBGRD (SG) TENANT: _____
FLOOR: _____ CONTRACTOR: _____

ALD
FIELD CIRCUIT TEST REPORT

ALD CIRCUIT DESIGNATION (Label)	INSULATION RESISTANCE						STRAY VOLTAGE		CAPACITANCE			RESISTANCE	LENGTH
	Red to Black (MΩ)	Red to Ground (MΩ)	Black to Ground (MΩ)	Red to Shield (MΩ)	Black to Shield (MΩ)	Shield to Ground (MΩ)	Red to Black (VAC)	Red to Black (VDC)	Red to Black (μF)	Red to Shield (μF)	Black to Shield (μF)	Red to Black (Ω)	Cable End to End (Feet)
ALD-													
ALD-													
ALD-													
ALD-													
ALD-													
ALD-													
ALD-													
ALD-													
ALD-													
ALD-													

Information to the Contractor: The recommended test instrument is the Fluke 87 Multimeter. The meter should have been calibrated within the last 12 months. Attention should be made to the measurement scale and or range requested on this form. This information can be found at the top of each column in brackets (). Incorrect scale and or range settings will result in readings that do not correlate with acceptable values resulting in possible rejection and resubmission. All Tests are made prior to device installation with circuit wiring stripped, tinned, shaped, shrunk, labelled and temporarily spliced through at device locations. Alteration of conductors except for final and device connections will result in mandatory retesting. Insulation Resistance / 1000 VDC- 1 Minute in MegaOhms far end open, Stray Voltage in Volts AC & DC far end open, Capacitance in MicroFarads far end open, Resistance in Ohms far end shorted. Length Measurement is End to End Distance of the Cable Assembly, not the combined length of the individual conductors.

12/15/03 CP/SP JD

Notes:

Test Performed:	Date Submitted:	WORLD TRADE CENTER MXLV BASE BUILDING FIRE ALARM SYSTEM	Date: [APPROVED] [REJECTED]	Date Filed:
By:	By:		By:	By:

BUILDING: 1WTC(NT) 2WTC(ST) 4WTC(SE) 5WTC(NE) CDNCS(CS) SUBGRD (SG) TENANT: _____
DOOR: _____ CONTRACTOR: _____

SPEAKER
FIELD CIRCUIT TEST REPORT

SPEAKER CIRCUIT DESIGNATION (Label)	INSULATION RESISTANCE			STRAY VOLTAGE		RESISTANCE	LENGTH
	Red to Black (MΩ)	Red to Ground (MΩ)	Black to Ground (MΩ)	Red to Black (VAC)	Red to Black (VDC)	Red to Black (Ω)	Cable End to End (Feet)
PK -							
PK -							
PK -							
PK -							
PK -							
PK -							
PK -							
PK -							
PK -							
PK -							
PK -							

Information to the Contractor: The recommended test instrument is the Fluke 87 Multimeter. The meter should have been calibrated within the last 12 months. Attention should be made to the measurement scale and or range requested on this form. This information can be found at the top of each column in brackets (). Incorrect scale and or range settings will result in readings that do not correlate with acceptable values resulting in possible rejection and resubmission. All tests are made prior to device installation with circuit wiring stripped, taped, shrunk, labelled and temporarily spliced through at device locations. Alteration of conductors except for final and device connections will result in mandatory retesting. Insulation Resistance / 1000 VDC- 1 Minute in MegaOhms per end open, Stray Voltage in Volts AC & DC per end open, Resistance in Ohms far end shorted. Length Measurement is End to End Distance of the Cable Assembly, not the combined length of the individual conductors.

12/15/99 CPV/SP-JD

Notes:

Test Performed:	Date Submitted:	WORLD TRADE CENTER MXLV BASE BUILDING FIRE ALARM SYSTEM	Date: [APPROVED] [REJECTED]	Date Filed:
	By:		By:	By:

ILDING: 1WTC(NT) 2WTC(ST) 4WTC(SE) 5WTC(NE) CONCS(CS) SUBGRD (SG) TENANT: _____

DOOR: _____ CONTRACTOR: _____

STROBE
FIELD CIRCUIT TEST REPORT

STROBE CIRCUIT SIGNATION (Label)	INSULATION RESISTANCE						STRAY VOLTAGE		RESISTANCE	LENGTH
	Red to Black (MΩ)	Red to Ground (MΩ)	Black to Ground (MΩ)	Red to Shield (MΩ)	Black to Shield (MΩ)	Shield to Ground (MΩ)	Red to Black (VAC)	Red to Black (VOC)	Red to Black (Ω)	Cable End to End (Feet)
IR -										
IR -										
IR -										
IR -										
IR -										
IR -										
IR -										
IR -										
IR -										
IR -										
IR -										

Information to the Contractor: The recommended test instrument is the Fluke 87 Multimeter. The meter should have been calibrated within the last 12 months. Attention should be made to the measurement scale and or range requested on this form. This information can be found at the top of each column in brackets (). Incorrect scale and or range settings will result in readings that do not correlate with acceptable values resulting in possible rejection and resubmission. All Tests are made prior to device installation with circuit wiring stripped, taped, shrunk, labelled and temporarily spliced through at device locations. Alteration of conductors except for final and device connections will result in mandatory retesting. Insulation Resistance / 1000 VDC- 1 Minute in MegaOhms far end open, Stray Voltage in Volts AC & DC far end open, Resistance in Ohms far end shorted. Length Measurement is End to End Distance of the Cable Assembly, not the combined length of the individual conductors.

12/15/04 CB/SP/JD

Notes:

Test Performed:	Date Submitted:	WORLD TRADE CENTER MXLV BASE BUILDING FIRE ALARM SYSTEM	Date: [APPROVED] [REJECTED]	Date Filed:
	By:		By:	By:

This checklist is designed to assist the contractor, to reduce construction delays, accelerate tenant occupancy, increase productivity and reduce delivered costs. The items listed are required to be completed prior to the scheduling of the WTC Base Building Fire Alarm System Tie-In and Pre-Testing.

Please direct completed forms, scheduling and technical requests to Mr Ray Simonetti, at 212-435-5005

>>>> 24 Hour Advance Notice Required Prior to Tie-In and Pre Testing Scheduling <<<<

- 1 TENANT Name _____ (PRINT)
- 2 BLDG Location 1WTC 2 WTC 4WTC 5WTC CONCOURSE SUBGRADE (CIRCLE) X
- 3 BLDG Floor: _____ (PRINT)
- 4 CONTRACTOR Name: _____ (PRINT)
- 5 Wire Test Results - Submitted, Corrected as Required and Approved. [] Completed [] Not Applicable
- 6 Speaker/Strobe Wiring in TSC, ALD Wiring in ATC Ready for Tie-In. [] Completed [] Not Applicable
- 7 Speakers set at selected power levels and installed.
(Power setting ,in Watts, per Design) [] Completed [] Not Applicable
- 8 Strobes match selected power levels and installed.
(Power setting ,in Candela, per Design) [] Completed [] Not Applicable
- 9 Smoke Detectors programmed, labelled and installed. [] Completed [] Not Applicable
- 10 TRI Interfaces programmed, labelled and installed. [] Completed [] Not Applicable
- 11 Waterflow and Tamper Devices Installed and Operational. [] Completed [] Not Applicable
- 12 Tenant SubSystem(s) Installed and Operational. [] Completed [] Not Applicable
- 13 Fire Alarm Drawings - As Installed including all Changes.
(2 Sets - Submitted in Advance to PA O&M Electrical Supervisor) [] Completed [] Not Applicable
- 14 Architect, Engineer, and General Contractor concur with Status. [] Completed [] Not Applicable


- 15 I certify that the WTC Base Building Fire Alarm Work required for the referenced Tenant Project has been completed in its entirety compliant with the Plans and Specifications submitted and Released, and I am ready for the System Pretest

FAX COMPLETED FORMS TO:
Mr Ray Simonetti
WTC O&M - Electrical
1-212-435-5717

16 Signed: _____

17 Date: _____

TYPICAL CABLE LABELING METHOD

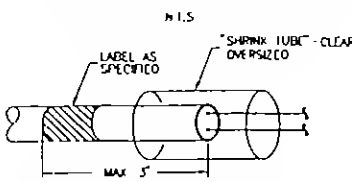


APPLY LABEL TO OUTER JACKET OF CABLE
MAXIMUM OF 5" FROM STRIPPED END AS SHOWN
NOT TO BE COVERED BY OVERSIZED SHRINK
DETAIL APPLIES TO ALL CABLE TYPES


CIRCUIT LEGEND:

TYPE OF CIRCUIT	CIRCUIT NUMBER OR NAME
STR - STROBE CIRCUIT	A TO G - STROBE OR SPEAKER CIRCUIT NUMBER
SPK - SPEAKER CIRCUIT	ATC - CIRCUIT TO ADDRESSABLE TERMINAL STRIP CABINET
ALD - ALD LOOP DEVICE CIRCUIT (EXCEPT SMOKE DETECTOR)	PS - CIRCUIT TO PULL STATIONS
TEL - TELEPHONE CIRCUIT	ELEV - CIRCUIT TO ELEVATOR LOBBY AND ELEVATOR
SD - SMOKE DETECTOR CIRCUIT	MRJ - MACHINE ROOM SMOKE DETECTORS
120 - CABLE PAIR #12 RUNNING DOWN TO TSC-1/2 FLOOR BELOW	HVAC - CIRCUIT TO HVAC SMOKE DETECTOR
121 - CABLE PAIR #12 RUNNING UP TO TSC-1/2 FLOOR ABOVE	AREA - CIRCUIT TO OPEN AREA SMOKE DETECTOR
122 - CABLE PAIR #12 RUNNING FROM WILLY (TRANSPONDER)	IC - INTERFACE CABINET CIRCUIT
	UR - MAINTENANCE PHONE JACK CIRCUIT
	WP - WARDEN TELEPHONE CIRCUIT
	SJ - STAND PIPE PHONE JACK CIRCUIT

TERMINATION LEGEND (EXISTING)

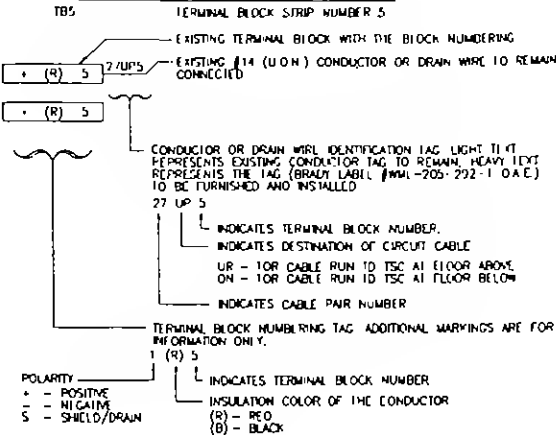

TYPICAL SHIELD/DRAIN INSULATING METHOD "A"

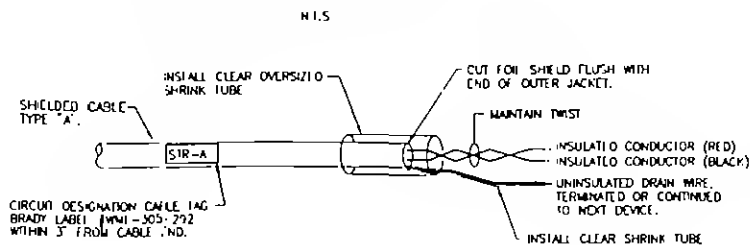

NOTES:

- FOR LEGEND, ABBREVIATIONS & GENERAL NOTES SEE DWG E-1.
- ALL SHIELDS MUST BE ISOLATED FROM GROUND APPROVED "SHRINK" TUBING SHALL BE USED ON ALL DRAIN CONDUCTORS SEE TYPICAL SHIELD/DRAIN INSULATING METHOD "A" ON THIS DWG.
- ALL WIRING SHALL BE FREE OF GROUND FAULTS, OPENES, SHORTS & STRAY VOLTAGES.
- ALL TSC-1 AND/OR TSC-2 ASSOCIATED WITH THIS TSC-M SHALL BE MODIFIED SIMULTANEOUSLY FOR THE COMPLETE MODIFICATION SCOPE. REFER EXISTING TSC BLOCK WIRING DIAGRAM.
- ALL WORK SHALL BE DONE IN THE PRESENCE OF THE INSPECTOR

Sheet 61

ISSUES

No Date Revision



TITLE

Designed by Drawn by Checked by


Date

Contract Number Drawing Number

SAMPLE FOR REFERENCE USE ONLY

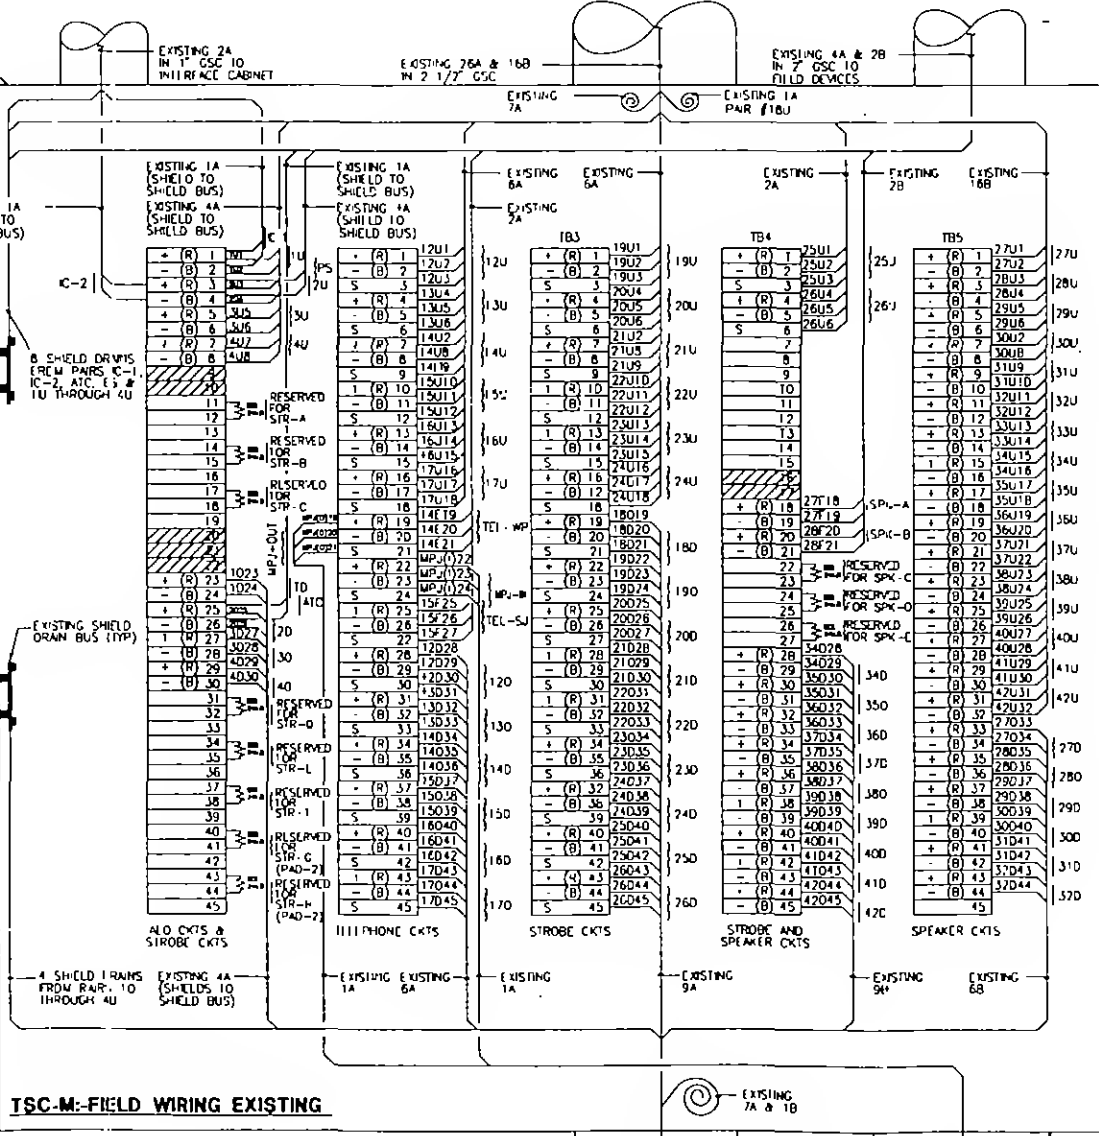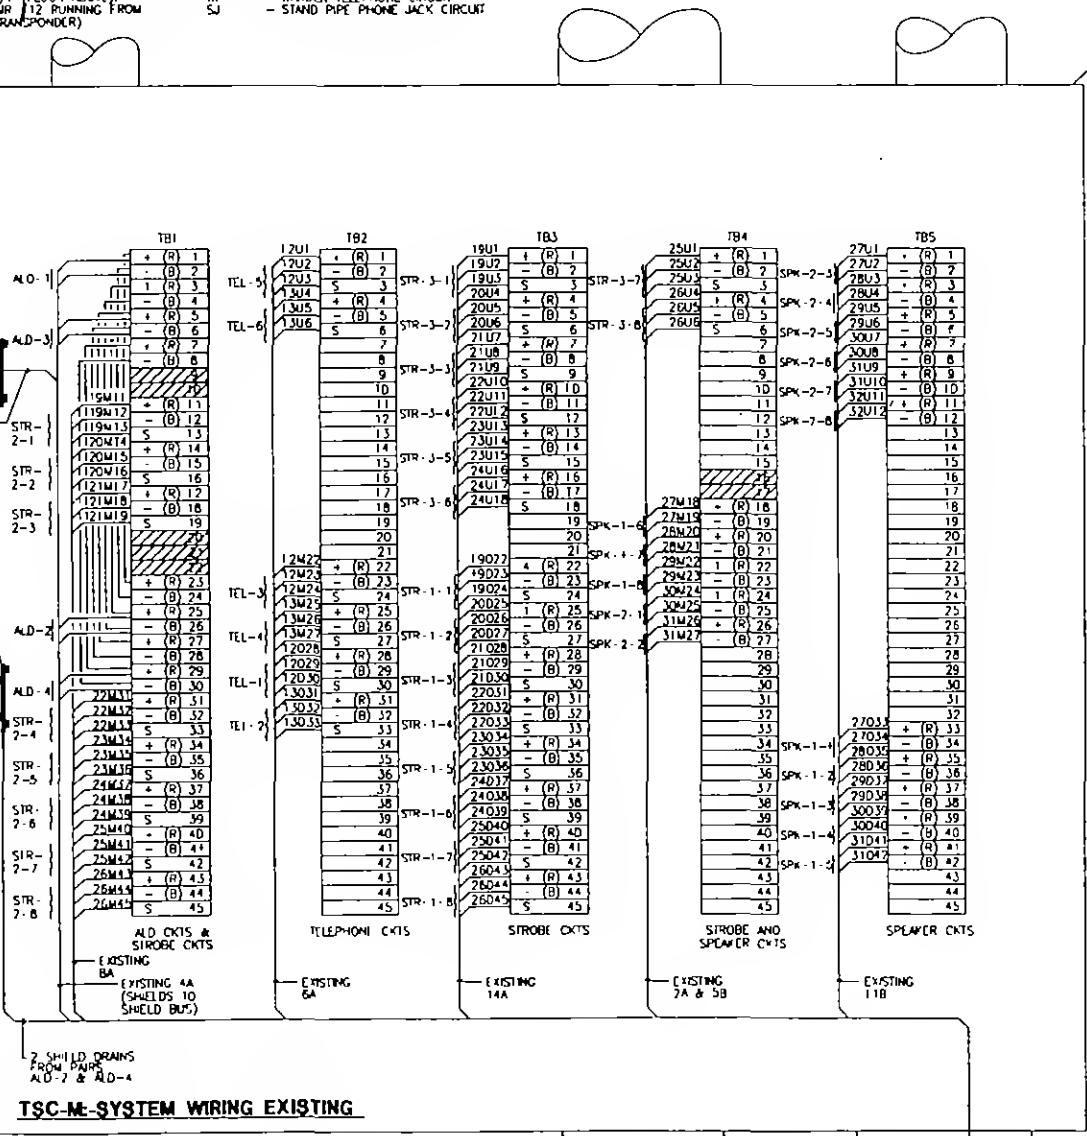

TYPICAL CABLE LABELING METHOD

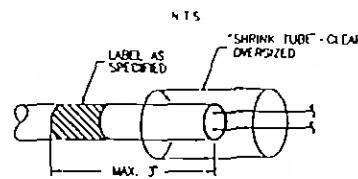


- APPLY LABEL TO OUTER JACKET OF CABLE. MAXIMUM OF 3" FROM STRIPPED END AS SHOWN. NOT TO BE COVERED BY OVERSIZED SHRINK TUBE. DETAIL APPLIES TO ALL CABLE TYPES.

CIRCUIT LEGEND:


- CIRCUIT DESIGNATION
- CABLE IDENTIFICATION TAG, LIGHT TEXT REPRESENTS EXISTING CABLE TAG TO REMAIN. HEAVY TEXT REPRESENTS THE TAG (BRADY LABEL #HML-305-792 D.A.F.) TO BE FURNISHED & INSTALLED.
- TYPE OF CIRCUIT
- ELEV - CIRCUIT TO ELEVATOR LOBBY SMOKE DETECTORS.
- HVAC - CIRCUIT TO HVAC SMOKE DETECTORS.
- AREA - CIRCUIT TO OPEN AREA SMOKE DETECTORS.
- TEN1 - CIRCUIT TO TENANT ALD LOOP DEVICES.
- TEN2 - CIRCUIT TO TENANT ALD LOOP DEVICES.

TYPICAL SHIELD/DRAIN INSULATING METHOD "A"

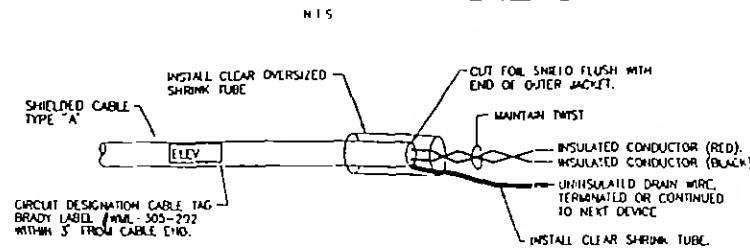

NOTES:

1. FOR LEGEND, ABBREVIATIONS & GENERAL NOTES, SEE DWG E-1
2. ALL SHIELDS MUST BE ISOLATED FROM GROUND. APPROVED "SHRINK" TUBING SHALL BE USED ON ALL DRAIN CONDUCTIONS. SEE TYPICAL SHIELD/DRAIN INSULATING METHOD "A" ON THIS DWG.
3. ALL WIRING SHALL BE FREE OF GROUND FAULTS, OPENS, SHORTS & STRAY VOLTAGES.
4. ALL WORK SHALL BE DONE IN THE PRESENCE OF THE ENGINEER. FINAL TERMINATIONS OF FIELD CIRCUITS TO BE DONE BY OTHERS.

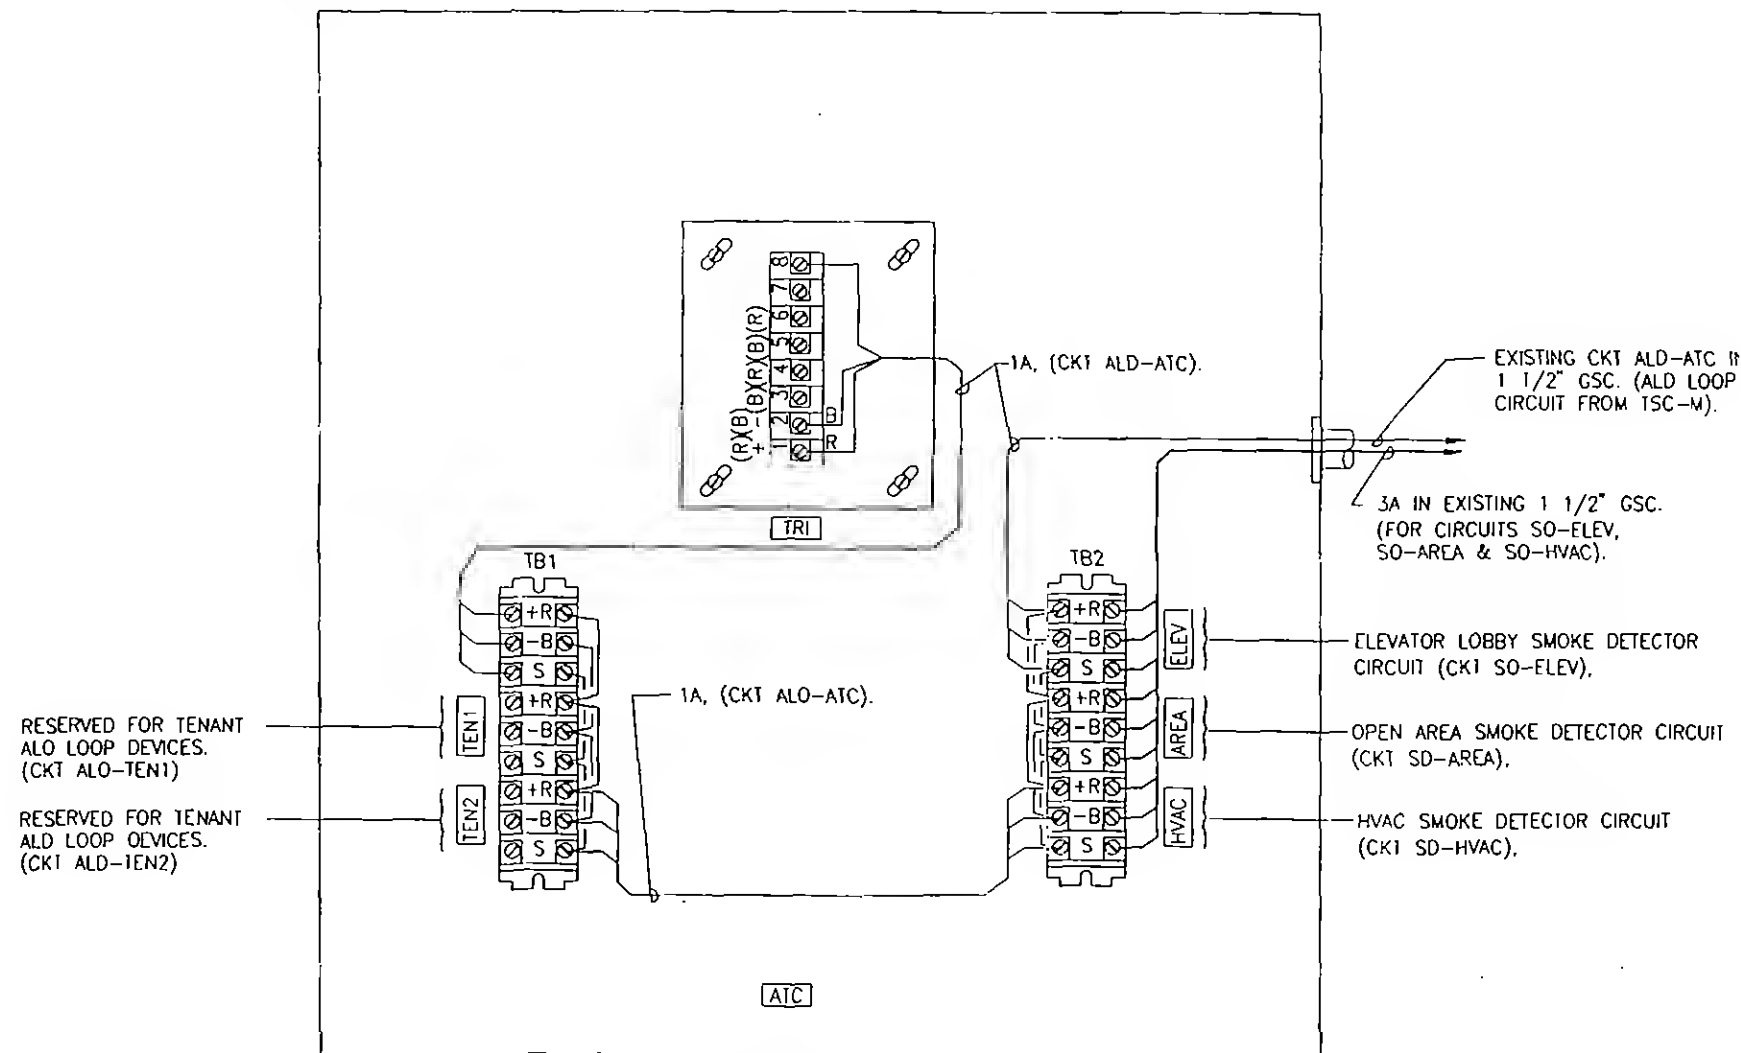

ATC CABINET
BLOCK WIRING DIAGRAM
N.I.S.

Sheet of

ISSUES

SAMPLE
FOR REFERENCE USE ONLY

Designed by Drawn by Checked by


Date

Contract Number Drawing Number


ABBREVIATIONS

ALD	ANALOG LOOP DRIVER
ATC	ADDRESSABLE TERMINAL CABINET
CKT	CIRCUIT
CD	CANDELLA
DWG	DRAWING
EL	ELECTRIC
ELEV	ELEVATOR
EMR	ELEVATOR MACHINE ROOM
EXIS	EXISTING
F.A.	FIRE ALARM
FL	FLOOR
FCD	FUSE CUTOFF
F.M.C.	FLEXIBLE METALLIC CONDUIT
GND	GROUND
GSC	GALVANIZED STEEL CONDUIT
MER	MECHANICAL EQUIPMENT ROOM
MTO	MOUNTED
N.T.S.	NOT TO SCALE
O.A.E.	OR APPROVED EQUAL
PS	PULL STATION
P.B.	PULL BOX
SPK	SPEAKER
STR	STROBE
TL	TELEPHONE
TRI	ADDRESSABLE INTERFACE MODULE
TSC	TERMINAL STRIP CABINET
U.O.N.	UNLESS OTHERWISE NOTED
W	WATT
WTC	WORLD TRADE CENTER


TERMINATION LEGEND

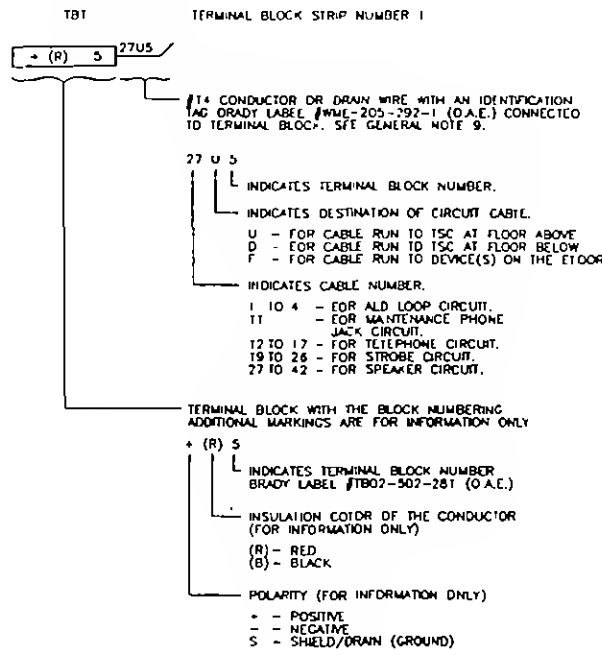

CIRCUIT LEGEND

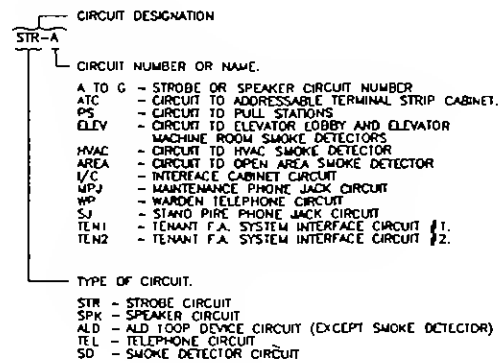

LEGEND/SPECIFICATION

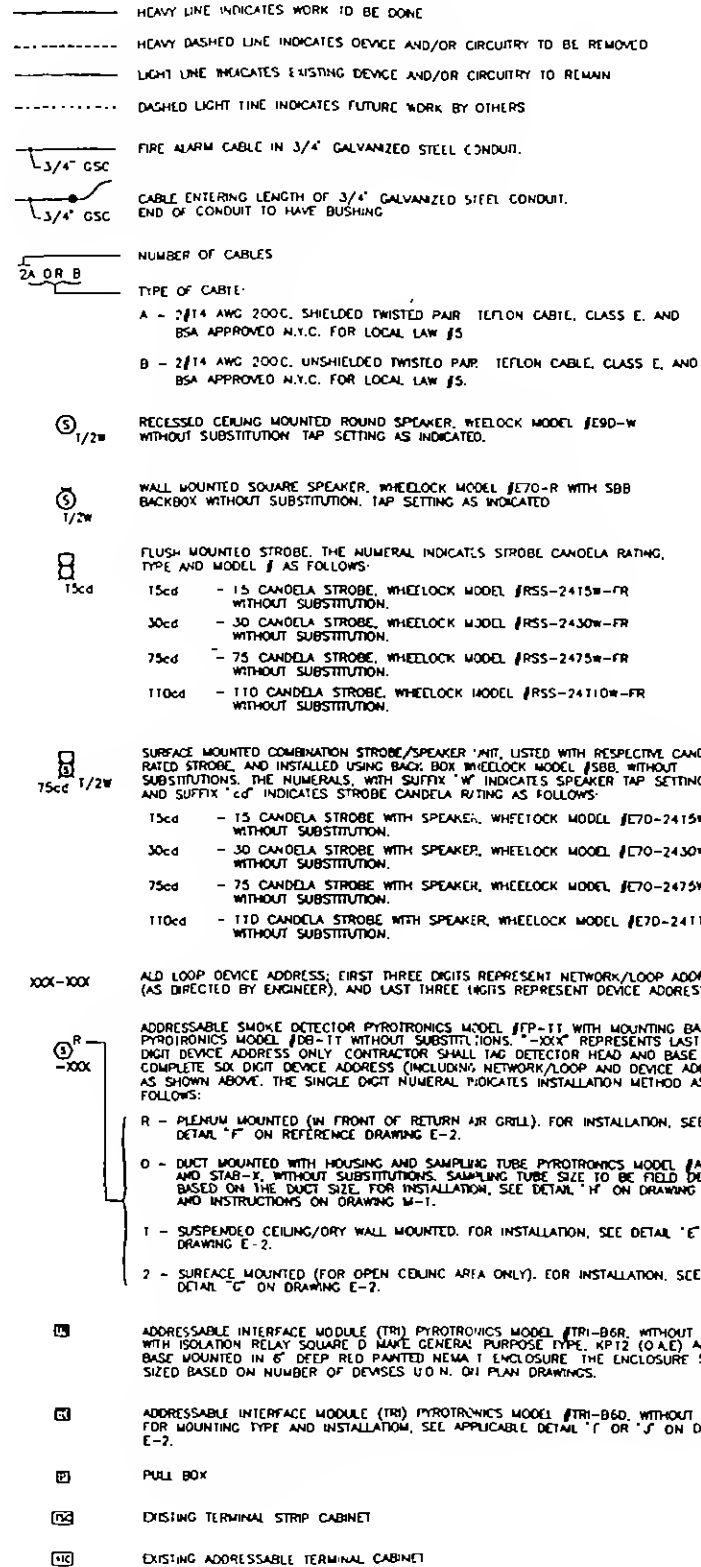

GENERAL NOTES

- ALL FIRE ALARM CABLES SHALL BE TYPE FPLP-UL TWISTED PAIR #14 GAUGE SOLID COPPER, 200C, 600V, SHIELDED (EXCEPT FOR SPEAKERS WHICH USE UNSHIELDED), INSULATED CONDUCTORS, CLASS "E", BSA AND MEA APPROVED FOR NYC LOCAL LAW #5 WITH FLP (TEFLON OR APPROVED EQUAL) INSULATION, AND CONDUCTORS COLORED BLACK & RED. ALL FIRE ALARM CABLES WILL BE FURNISHED AND INSTALLED BY THE CONTRACTOR. ALL CABLES INSTALLED IN HUNG CEILING AND ABOVE SHEETROCK CEILING SHALL BE MOUNTED AND SUPPORTED ABOVE THE CEILING AND INSTALLED WITHOUT CONDUITS, UNLESS OTHERWISE NOTED. ALL OPEN AREAS AND MER'S WILL UTILIZE CONDUITS.
- ASSEMBLE DRAIN WIRE AT BOTH ENDS OF SHIELDED CABLES USING TYPICAL SHIELD/DRAIN INSULATING METHOD AS SHOWN ON DRAWING E-3. SHIELD MUST BE CONTINUOUS THROUGHOUT THE CIRCUIT AND INSULATED.
- PROGRAMMING OF BASE BUILDING SYSTEM FIRE ALARM PANELS WILL BE BY THE AUTHORITY. PROGRAMMING OF ALL ADDRESSABLE DEVICES (SMOKE DETECTORS & TRIS) SHALL BE BY THE CONTRACTOR. FINAL CONFIRMATION OF ADDRESSES SHALL BE AS DIRECTED BY ENGINEER, PRIOR TO PROGRAMMING DEVICES.
- SET TAP SETTINGS ON ALL SPEAKERS (AS SHOWN ON DWG'S), PRIOR TO INSTALLATION.
- ALL CONDUITS SHALL BE RIGID STEEL, HOT DIPPED GALVANIZED WITH THREADED FITTINGS (U.O.N.)
- ALL PENETRATIONS MADE IN EXISTING FIRE ALARM EQUIPMENT SHALL BE MADE IN THE PRESENCE OF THE ENGINEER. NO TOP PENETRATIONS SHALL BE MADE IN ANY FIRE ALARM PANELS.
- PATCH & SEAL PENETRATIONS FROM ALL CONDUITS PASSING THRU WALLS, FIRE RATED CONSTRUCTION AND PLENUMS, WITH THERMAFIBER (O.A.E.).
- FOR MOUNTING DETAILS AND WIRING DIAGRAMS OF SPEAKERS, STROBES AND SMOKE DETECTORS AND TRIS SEE DWG E-2. NO "T" TAPPING WILL BE PERMITTED. ALL BOX COVERS, CONDUIT COVERS, ETC. SHALL BE PAINTED RED.
- FINAL CONNECTIONS IN THE TSC AND ATC CABINETS WILL BE MADE BY OTHERS. SHAPING AND LABELING OF ALL CABLES AT EXISTING TSC'S AND ATC'S SHALL BE PERFORMED BY THE CONTRACTOR. THIS WORK SHALL BE DONE IN THE PRESENCE OF THE ENGINEER.
- CONTRACTOR SHALL USE BRADY LABELS #WVL-205-292-1 (O.A.E.) FOR LABELING OF ALL CONDUCTORS AND #WVL-305-292 (O.A.E.) FOR LABELING OF ALL CABLES.
- UNDER THE DIRECTION OF THE ENGINEER, CONTRACTOR SHALL REMOVE EXISTING CEILING SURFACE MOUNTED SPEAKERS & SMOKE DETECTORS ONLY AFTER DEVICES TO BE INSTALLED ARE OPERATIONAL.
- ALL EQUIPMENT SHOWN TO BE REMOVED SHALL HAVE ITS ASSOCIATED TERMINATION WIRING ABANDONED AND TAPED IN PLACE. ENDS OF ABANDONED CABLES SHALL BE TAGGED "NOT IN USE".
- PRIOR TO INSTALLATION CONTRACTOR SHALL TEST, IN THE PRESENCE OF THE ENGINEER, ALL REELS OF FIRE ALARM CABLES FOR CONTINUITY AND SHORT CIRCUITS.
- FIRE ALARM CABLES SHALL BE TESTED IN ACCORDANCE TO THE AUTHORITY'S ENGINEERING TEST PROCEDURES. ALL TEST RESULTS SHALL BE SUBMITTED TO THE ENGINEER FOR APPROVAL.
- SMOKE DETECTORS ARE REQUIRED AT ALL RETURN AIR GRILLS. THE CONTRACTOR SHALL NOTIFY THE ENGINEER IMMEDIATELY UPON DISCOVERING ANY RETURN AIR GRILL NOT SHOWN ON THE CONTRACT DRAWINGS AND SHALL FURNISH & INSTALL SMOKE DETECTORS.
- AS SOON AS ACCESS TO THE CEILING AREA IS NO LONGER REQUIRED FOR THE INSTALLATION AND TESTING OF WIRING AND DEVICES, CONTRACTOR SHALL REPLACE ALL REMOVED CEILING TILES.
- ALL FINISHES DISTURBED BY THE INSTALLATION OF DEVICES OR WIRING SHALL BE RESTORED TO THEIR ORIGINAL OR MATCHING CONDITION.
- ALL TEMPORARY INSTALLATION AND WIRING BEING INSTALLED UNDER PHASE-I SHOULD COMPLY WITH PERMANENT INSTALLATION METHODS AND SPECIFICATIONS.

Sheet 01

ISSUES


SAMPLE

FOR REFERENCE USE ONLY

Designed by Drawn by Checked by

Date

Contract Number Drawing Number

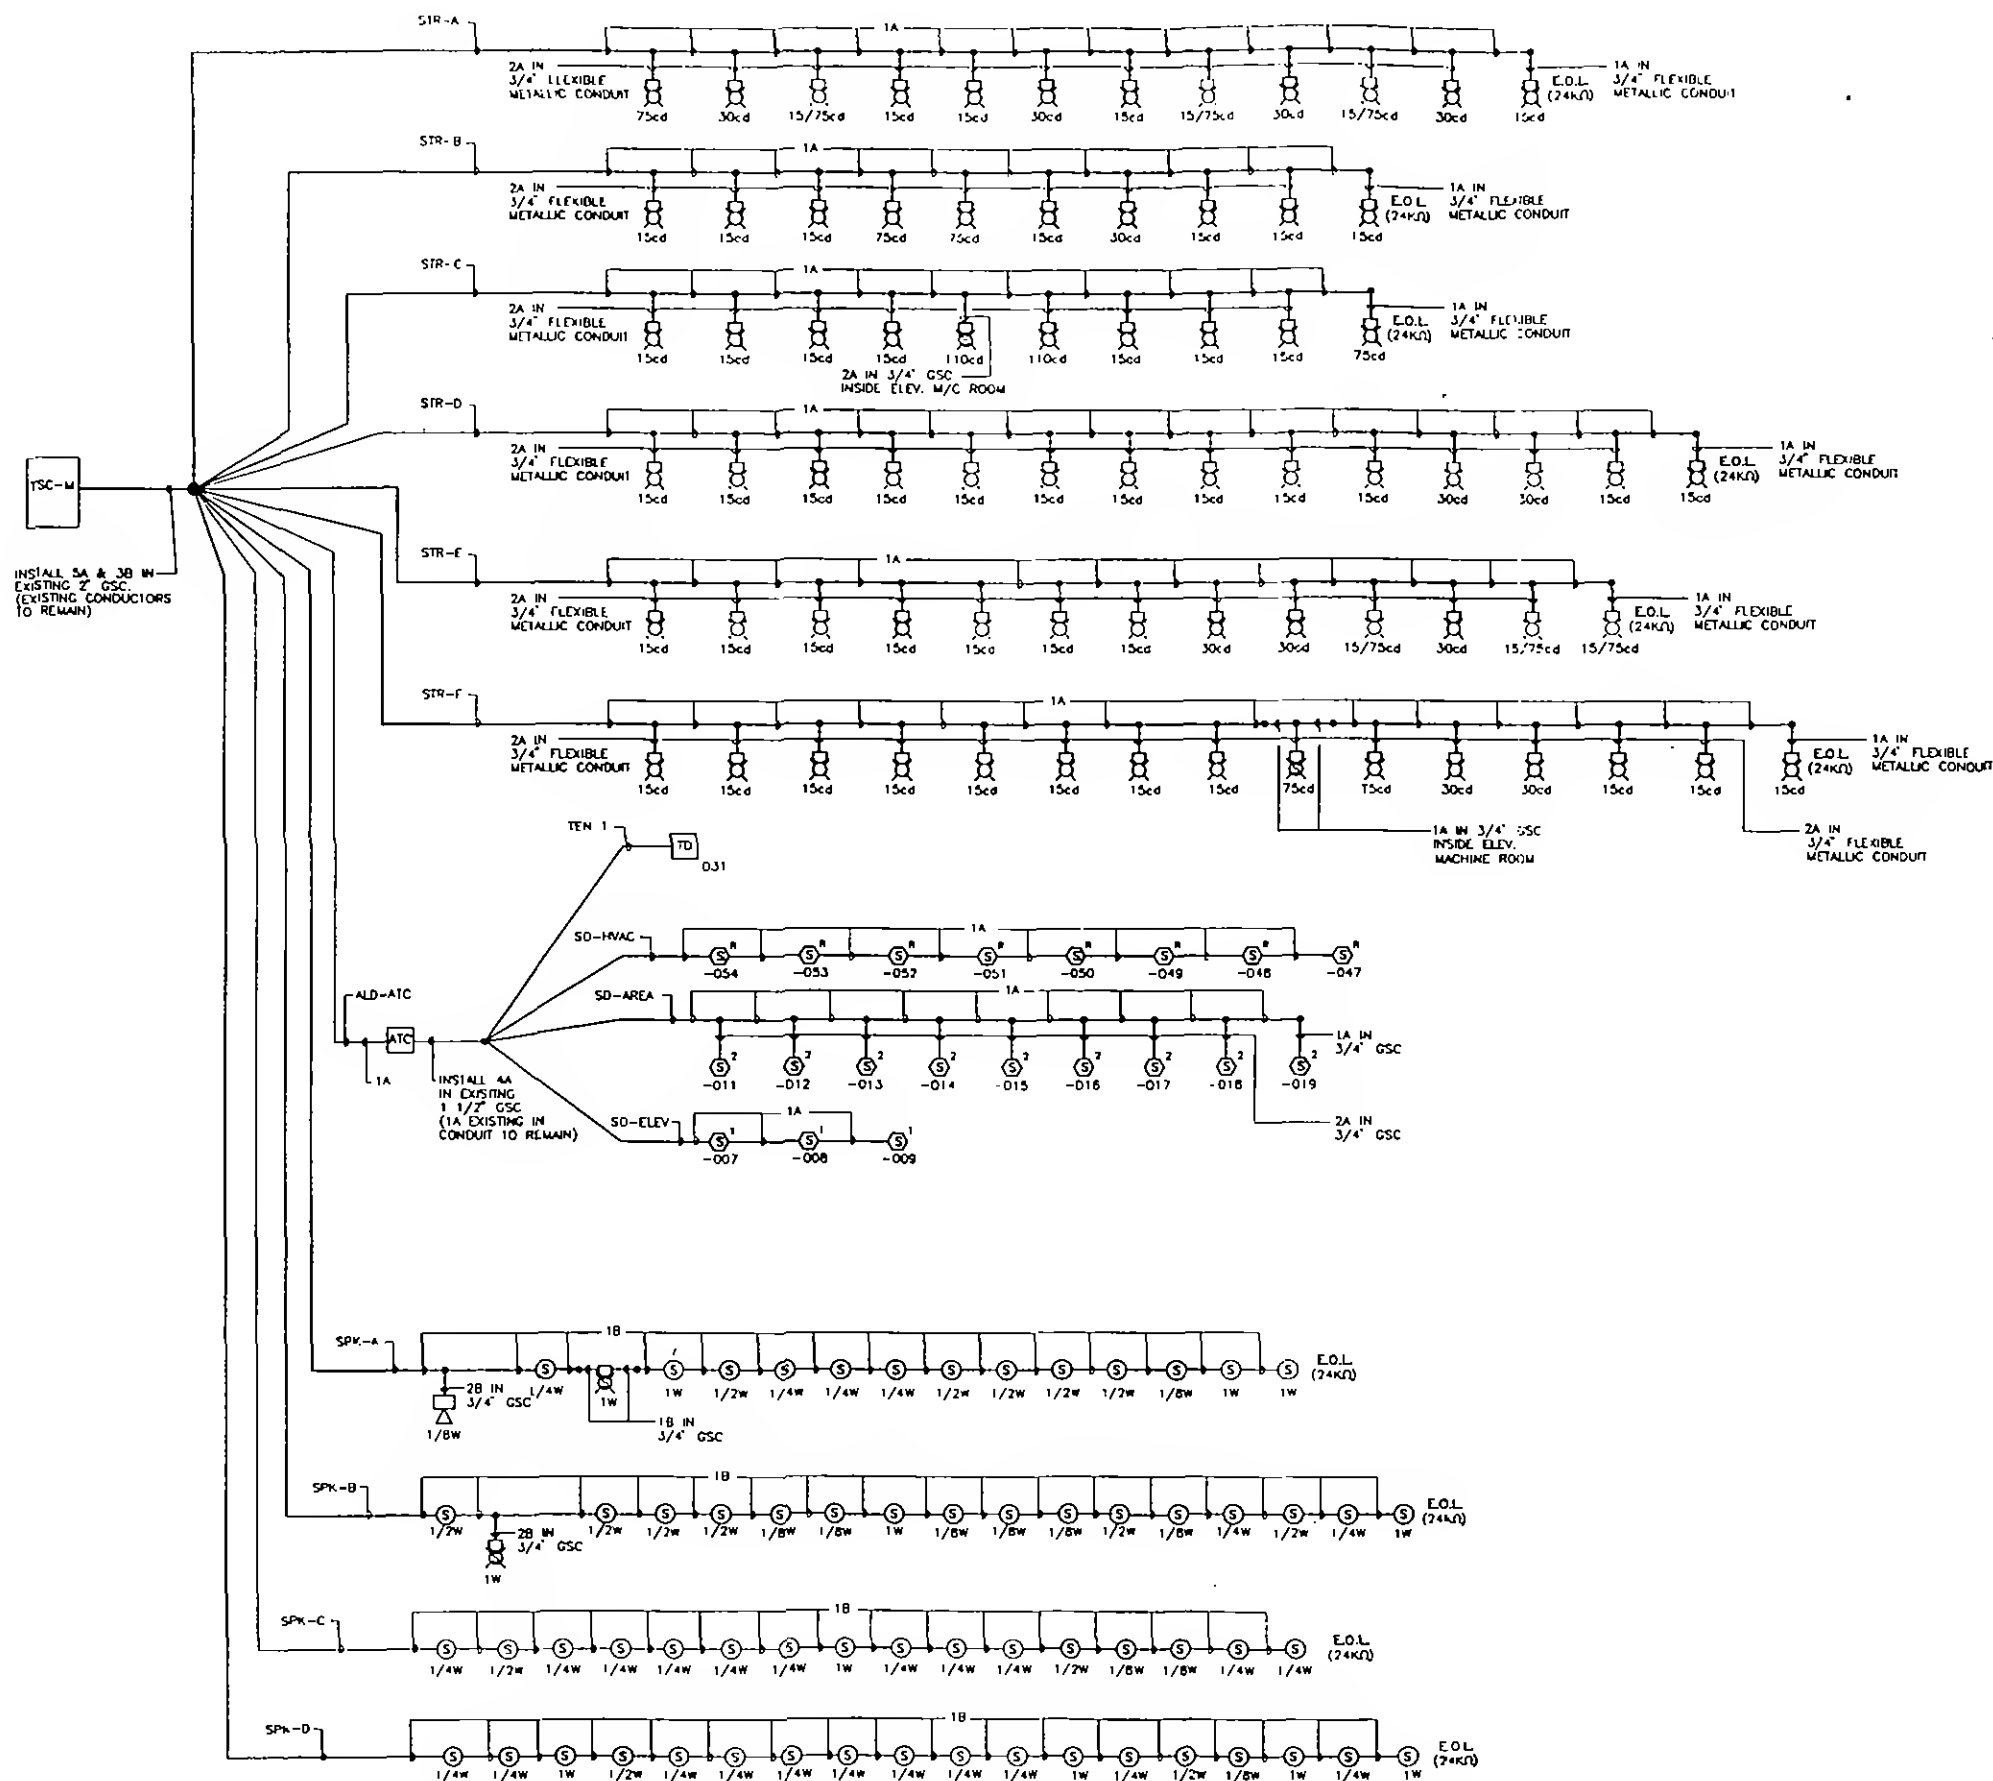


NOTE:
1. FOR LEGEND, ABBREVIATIONS AND GENERAL NOTES, SEE DWG E-1.
2. COMBINATION SPEAKER - STROBE UNITS ARE SHOWN TWICE FOR CLARITY OF CIRCUIT IDENTIFICATION

CIRCUIT LEGEND:

CIRCUIT DESIGNATION
STR - X

CIRCUIT NUMBER OR NAME
A TO C - STROBE AND SPEAKER CIRCUIT NUMBER
ATC - CIRCUIT TO ADDRESSABLE TERMINAL STRIP CABINET
ELEV - CIRCUIT TO ELEV LOBBY & ELEV MACHINE ROOM SMOKE DETECTORS
HVAC - CIRCUIT TO HVAC SMOKE DETECTORS
AREA - CIRCUIT TO OPEN AREA SMOKE DETECTORS

TYPE OF CIRCUIT
STR - STROBE CIRCUIT
SPK - SPEAKER CIRCUIT
ALD - ALD LOOP DEVICE (EXCEPT SMOKE DETECTOR) CIRCUIT
SD - SMOKE DETECTOR CIRCUIT

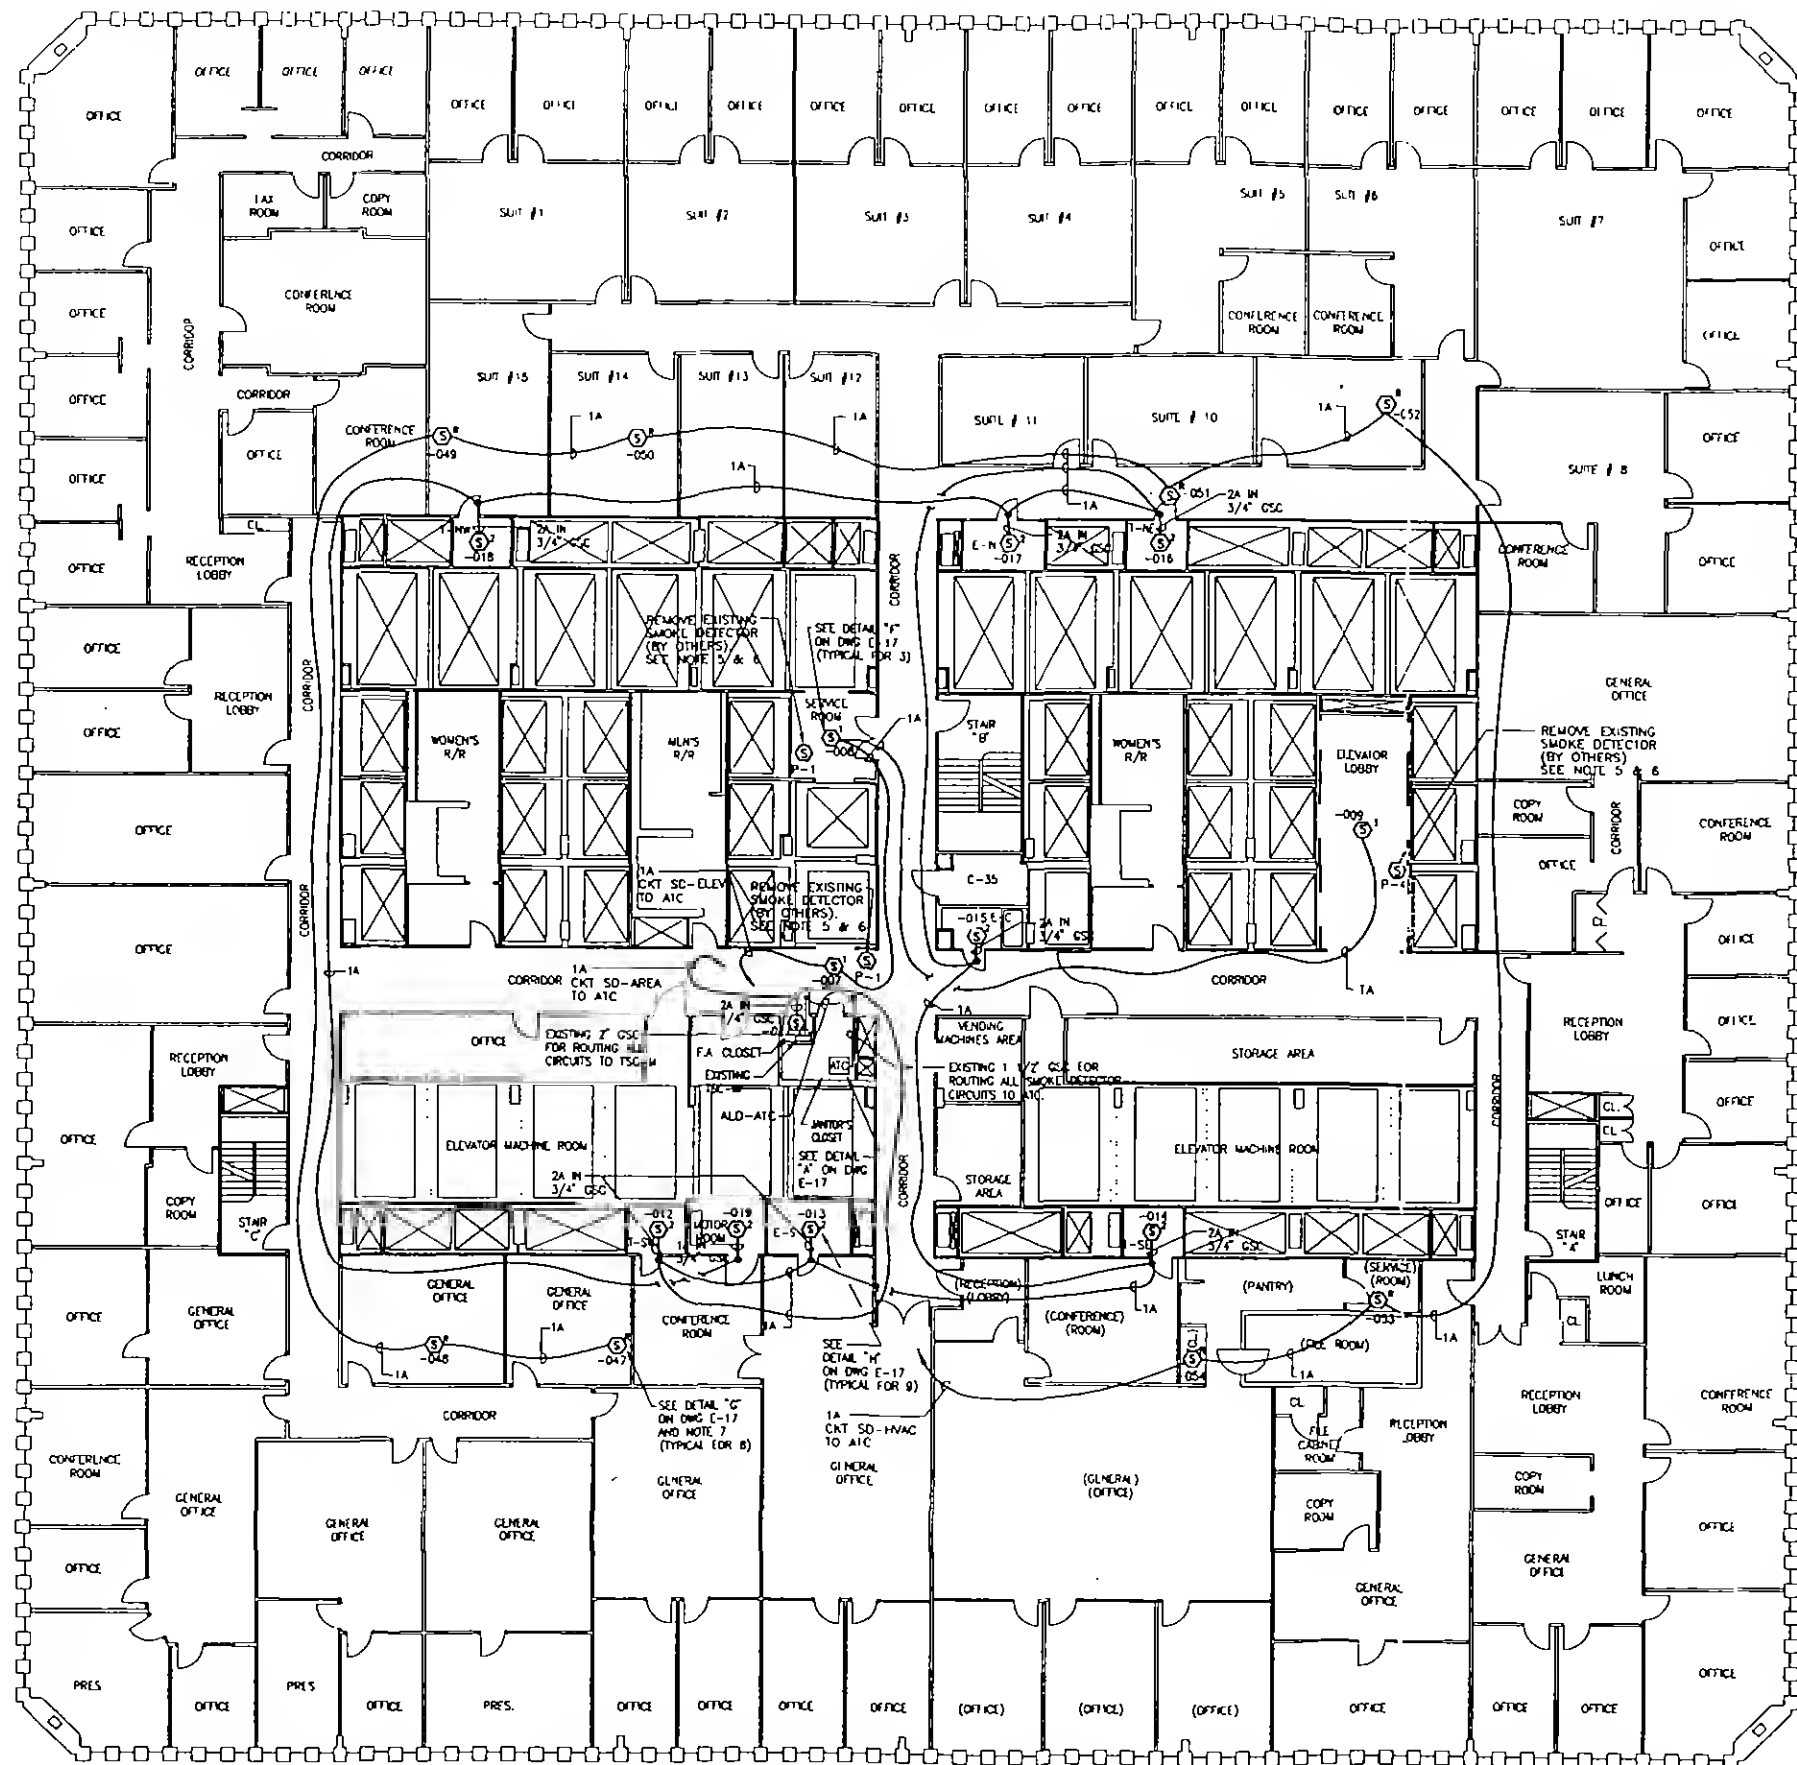

- NOTE:**
1. FOR LEGEND, ABBREVIATIONS AND GENERAL NOTES, SEE DWG E-1.
 2. FOR SMOKE DETECTOR INSTALLATION DETAILS, SEE DWG E-17.
 3. FOR SMOKE DETECTION/FIRE ALARM HVAC SHUTDOWN SCHEDULE, SEE DWG E-18. THIS SCHEDULE IS FOR INFORMATION ONLY AND REPRESENTS NO WORK TO THIS CONTRACTOR.
 4. ALL ADDRESSABLE SMOKE DETECTOR CIRCUITS RUN TO EXISTING AIC CABINET IN JANITORS CLOSET.
 5. REMOVAL OF OLD SMOKE DETECTORS AND PATCHING AS PER INDICATED PATCHING DETAIL NUMBER NEXT TO THE OLD SMOKE DETECTOR WILL BE MADE BY OTHERS.
 6. FOR REMOVAL AND PATCHING PLAN DETAILS (P-1, P-2, P-3 & P-4), SEE DWG A-1.
 7. FOR EXACT LOCATION SEE MECHANICAL REFERENCE DWG M-A-51.

Sheet 01

ISSUES


Date Revision

Designed by Drawn by Checked by

Date

Contract Number Drawing Number

SAMPLE
FOR REFERENCE USE ONLY

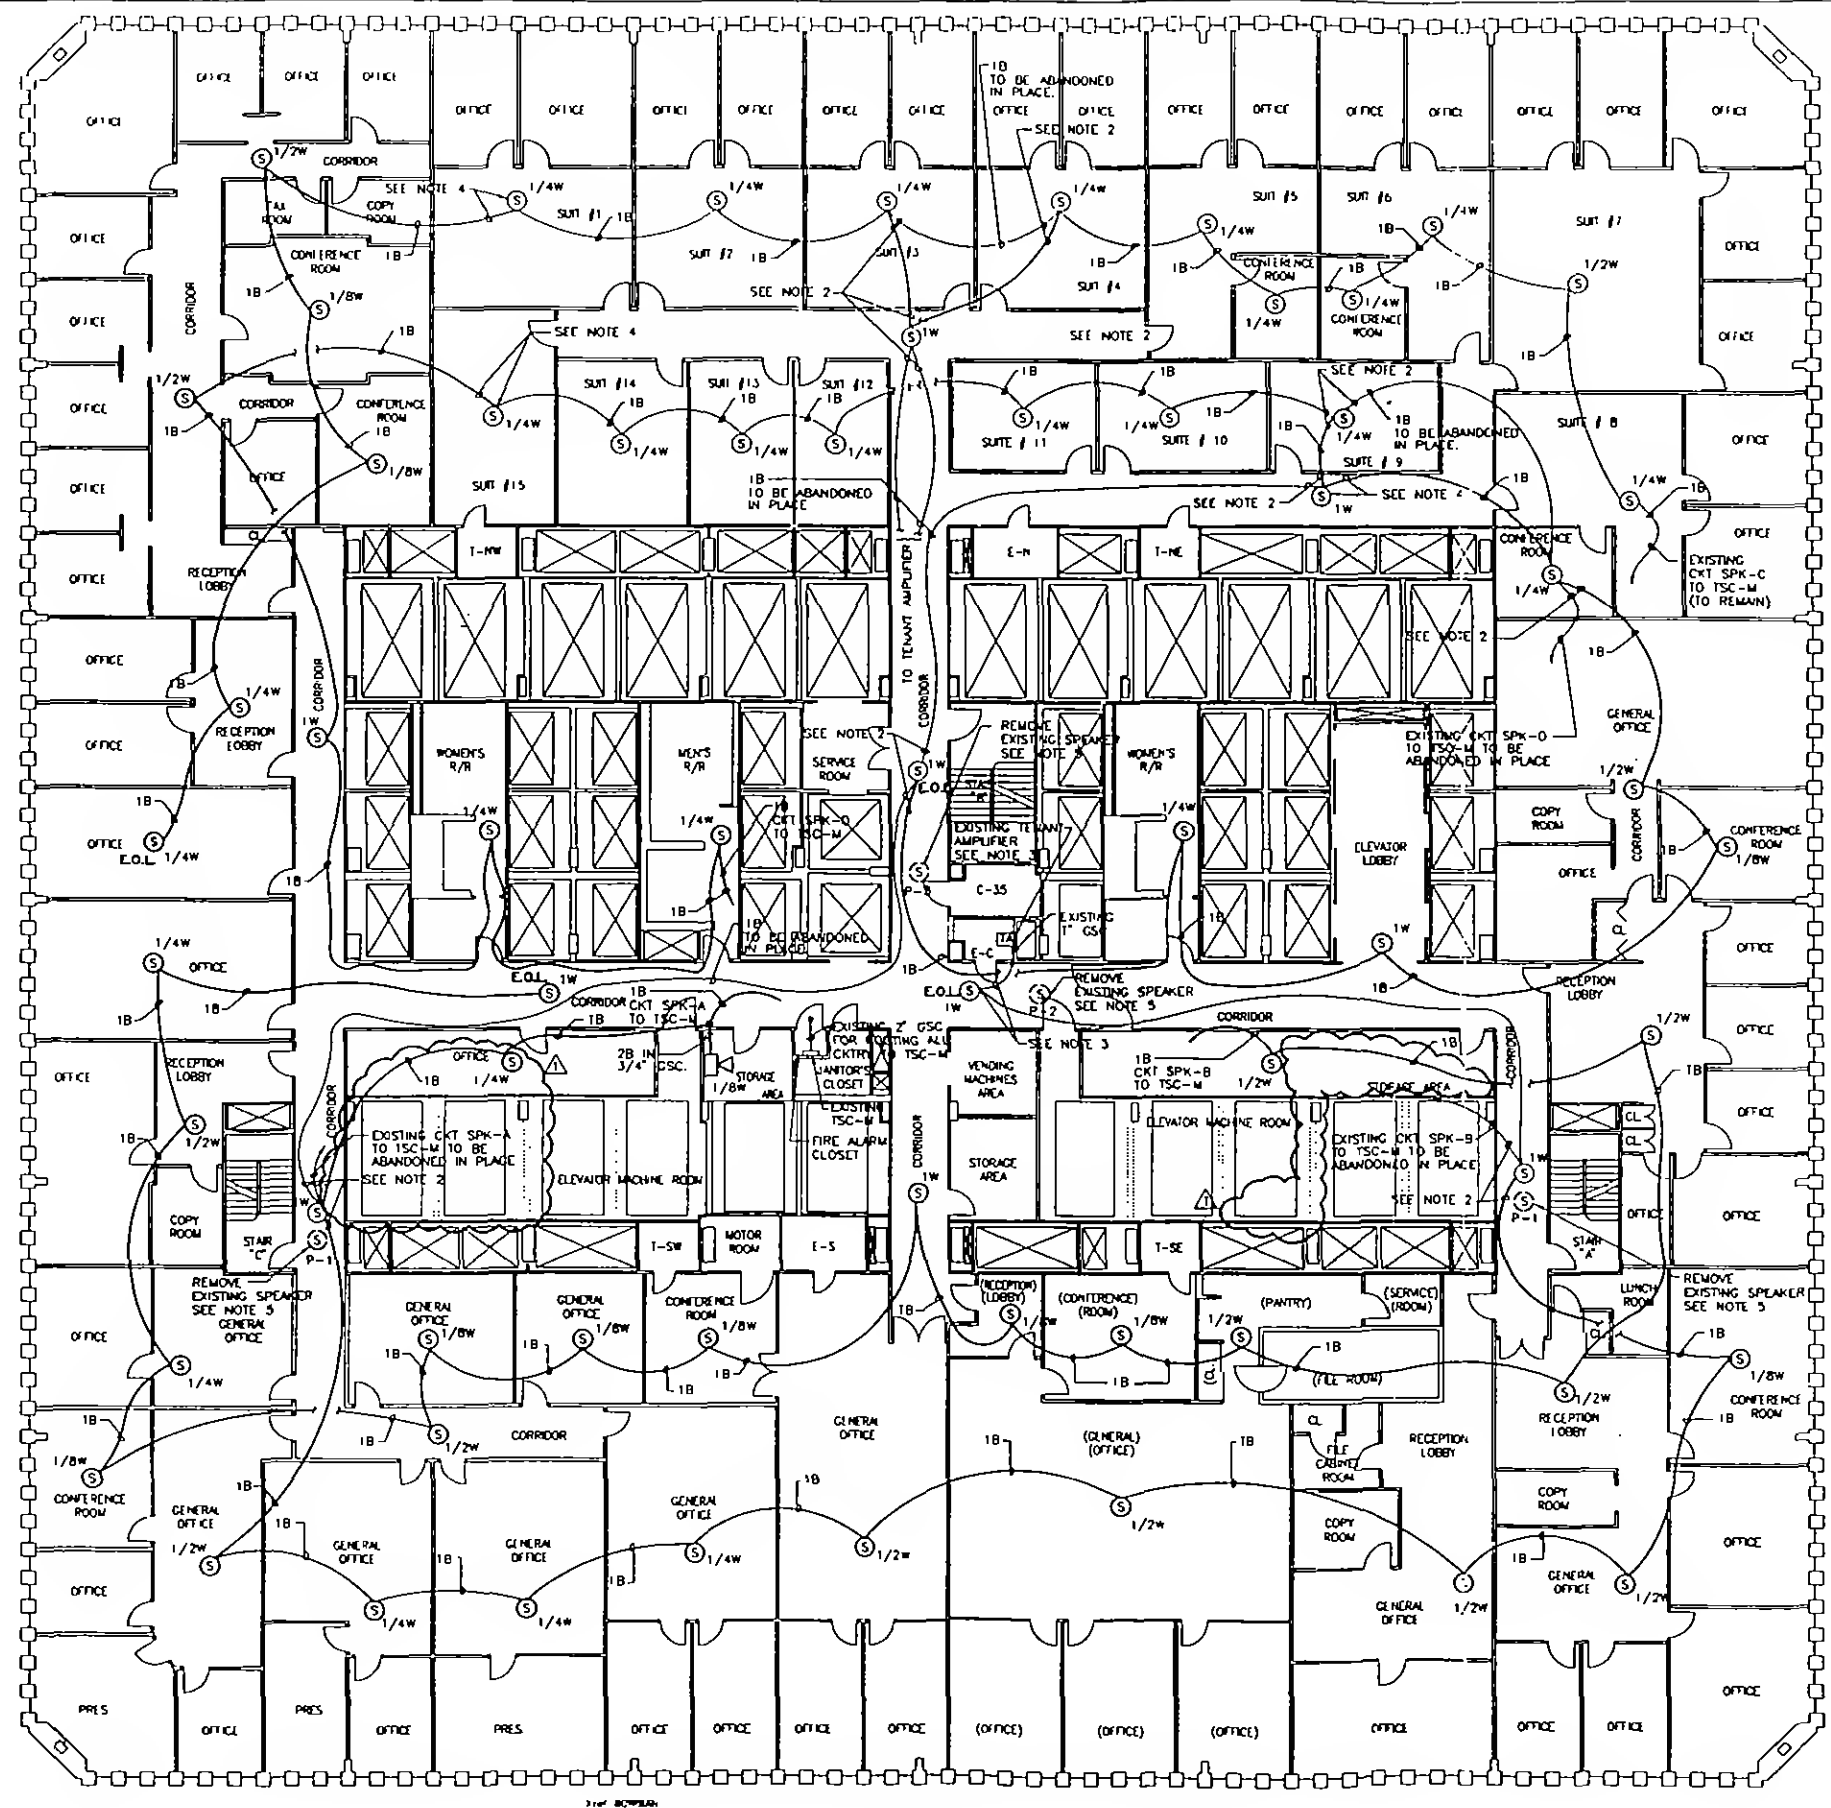

NOTE:

1. FOR LEGEND, ABBREVIATIONS AND GENERAL NOTES, SEE DWG E-1.
2. LEAVE 3' OF COILED CABLE (TAG & TAPE CONDUCTOR ENDS) AT EXISTING SPEAKER. DISCONNECTION OF EXISTING SPEAKER CIRCUIT WIRING AND FINAL CONNECTION TO EXISTING SPEAKER WILL BE MADE BY OTHERS.
3. DISCONNECTION AND REMOVAL OF EXISTING TENANT AMPLIFIER AND ASSOCIATED WIRING UP TO THIS LAST SPEAKER, AND CONNECTION OF E.O.L. RESISTOR AT THE LAST SPEAKER WILL BE MADE BY OTHERS AFTER INSTALLED SPEAKERS ARE TESTED AND OPERATIONAL.
4. LEAVE 3' OF COILED CABLE (TAG & TAPE CONDUCTOR ENDS) AT EXISTING SPEAKER. REMOVAL OF THE EXISTING E.O.L. RESISTOR AND FINAL CONNECTION TO EXISTING SPEAKER WILL BE MADE BY OTHERS.
5. REMOVE OLD SPEAKERS AS DIRECTED BY THE ENGINEER AND PROVIDE PATCHING AS PER INDICATED PATCHING DETAIL NUMBER NEXT TO THE OLD SPEAKER. DISCONNECTION OF OLD SPEAKERS WILL BE MADE BY OTHERS.
6. FOR REMOVAL AND PATCHING PLAN DETAILS (P-1, P-2, P-3 & P-4), SEE DWG A-1.
7. THIS COMBINATION SPEAKER/STROBE AND ASSOCIATE CONDUIT ARE ALSO SHOWN ON STROBE INSTALLATION PLAN DWG E-5.

SPEAKER CIRCUIT/LOADING TABLE

SPEAKER TAP/DB SETTING	Watts	1/8	1/4	1/2	1	2	4	TOTAL POWER (Watts)	CIRCUIT LENGTH (ft.)
SPK-A	75	78	81	84	87	90	-	6.750	525
SPK-B	2	4	5	3	-	-	-	6.250	550
SPK-C	6	2	6	2	-	-	-	5.000	625
SPK-D	2	11	2	1	-	-	-	7.875	465
GRAND TOTAL									2165

Sheet of


ISSUES

SAMPLE
FOR REFERENCE USE ONLY

Designed by Drawn by Checked by

Date

Contract Number Drawing Number

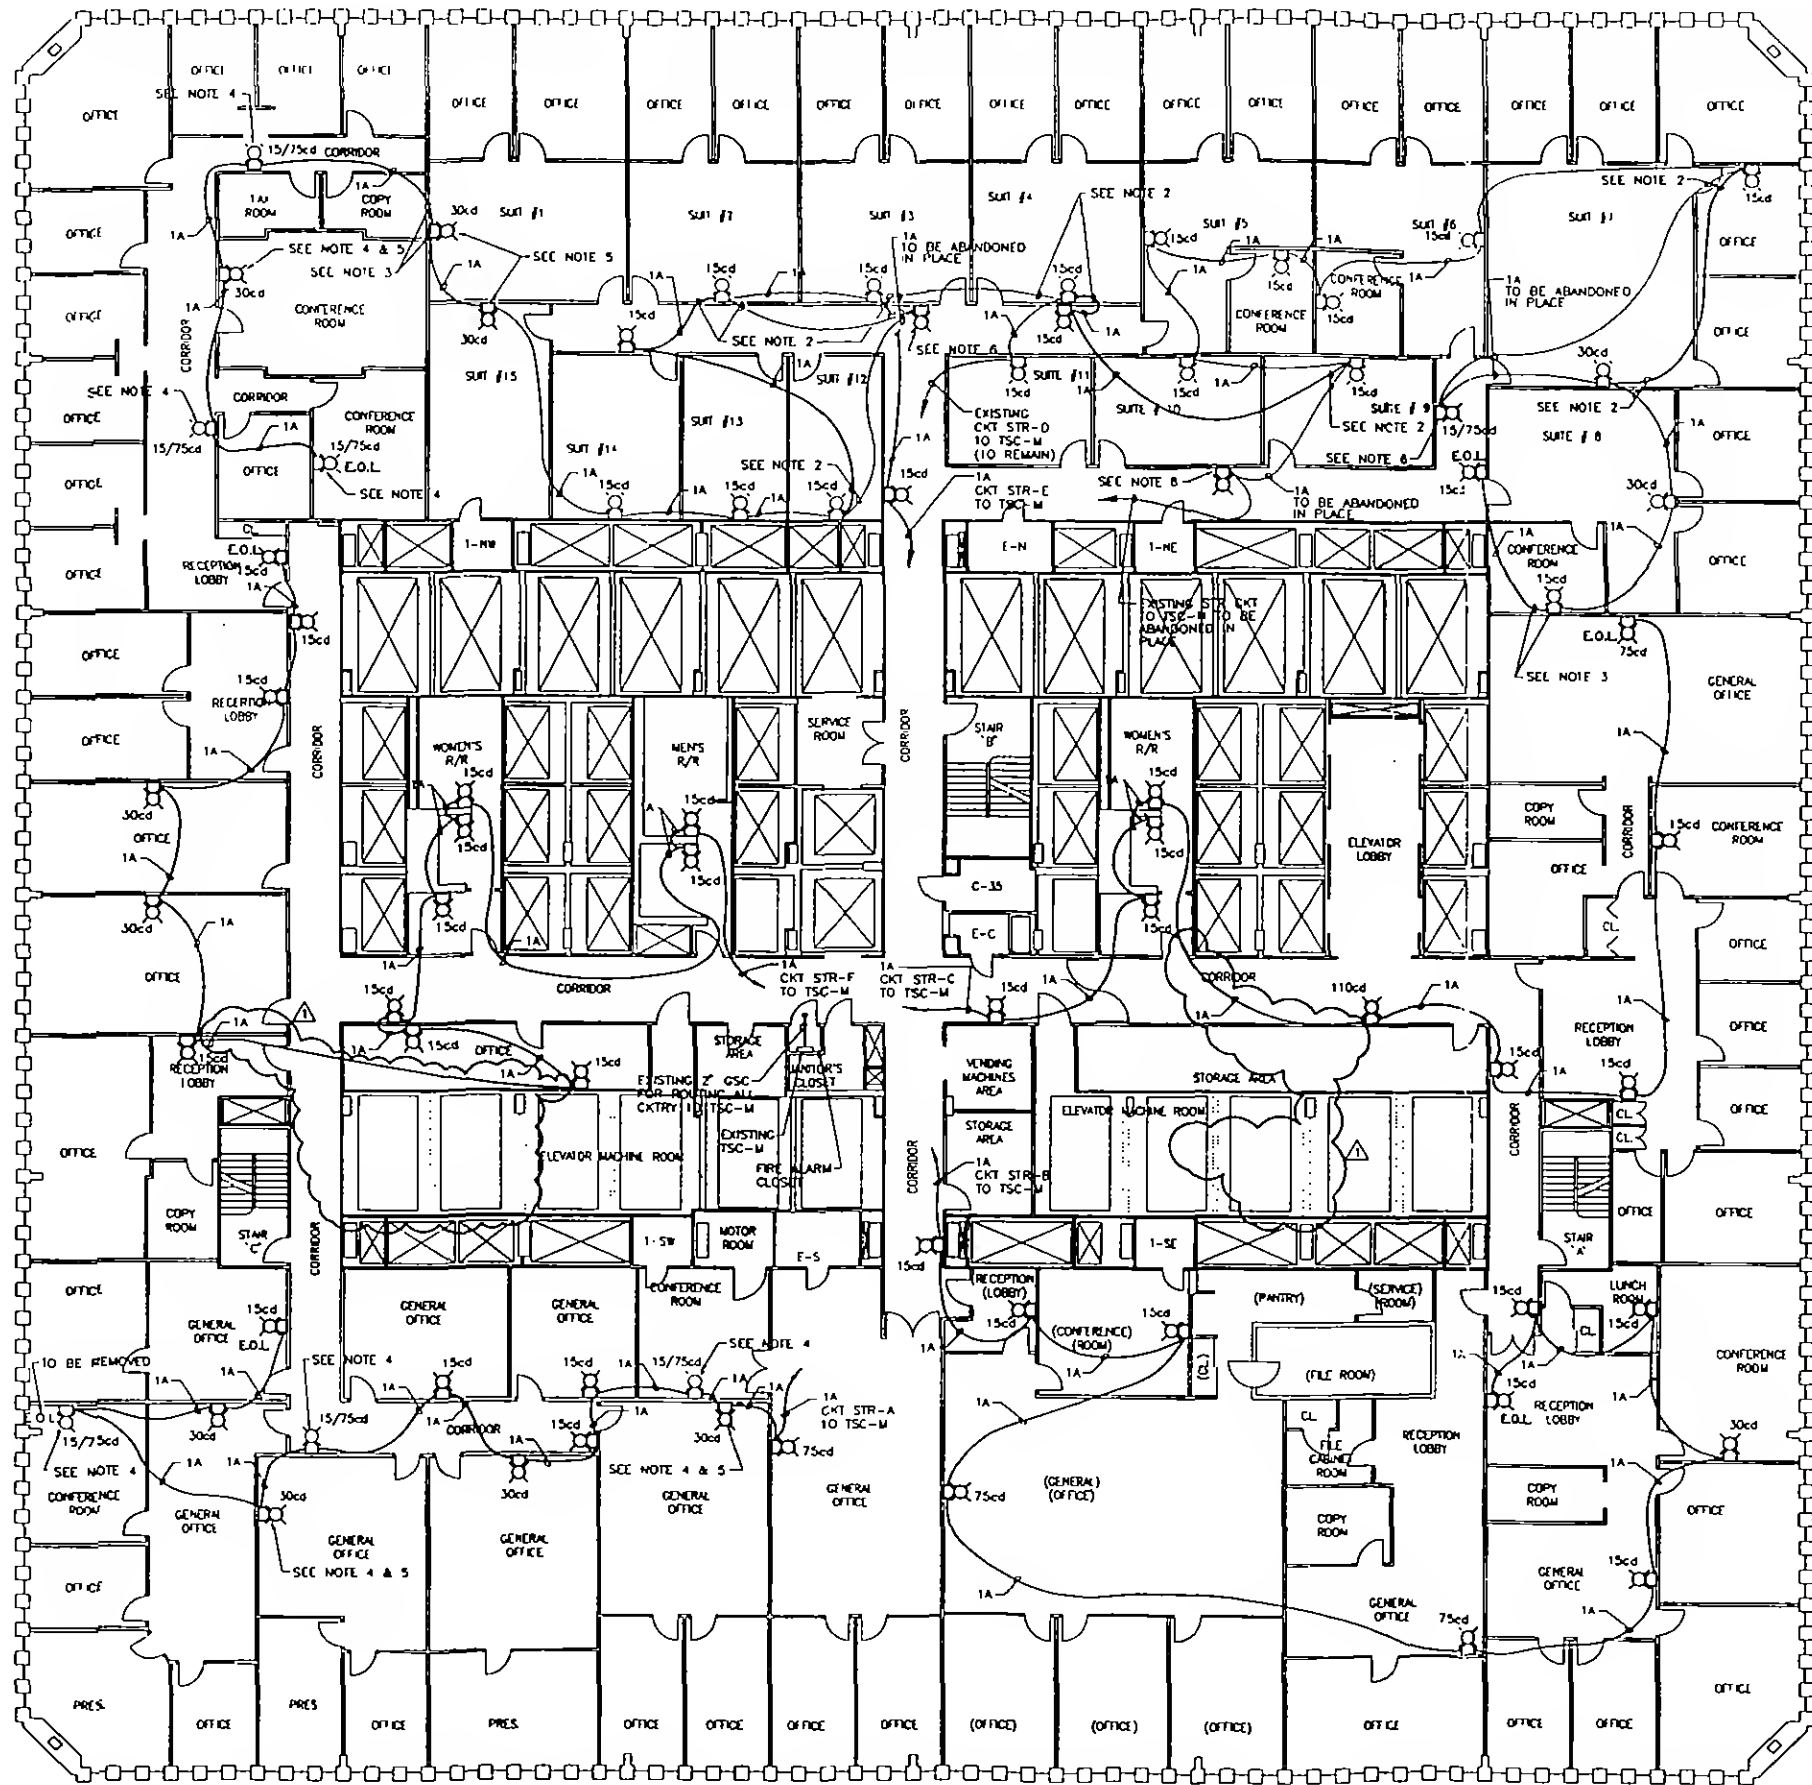

NOTE:

1. FOR LEGEND, ABBREVIATIONS AND GENERAL NOTES SEE DWG E-1.
2. LEAVE 8' COILED CABLE (TAG AND TAPE CONDUCTOR ENDS) AT EXISTING STROBE IN THE SUSPENDED CEILING. DISCONNECTION OF EXISTING STROBE CIRCUIT WIRING AND FINAL CONNECTION TO TO EXISTING STROBE WILL BE MADE BY OTHERS.
3. LEAVE 8' COILED CABLE (TAG AND TAPE CONDUCTOR ENDS) AT EXISTING STROBE IN THE SUSPENDED CEILING. DISCONNECTION OF EXISTING C.O.L. RESISTOR AND FINAL CONNECTION TO EXISTING STROBE WILL BE MADE BY OTHERS.
4. DISCONNECT STROBE AND ABANDON WIRING IN PLACE (TAG & TAPE CONDUCTOR ENDS), AND REWIRE AS SHOWN.
5. REPLACE EXISTING STROBE WITH 30 CANDELA RATED STROBE AND WIRE AS SHOWN (UTILIZE EXISTING BACK BOX AND CONDUIT STUB).
6. AFTER INSTALLED STROBES ARE TESTED AND OPERATIONAL, REMOVE STROBE AND RETAIN TO AUTHORITY, AND INSTALL BLANK COVER PLATE AND PAINT (MATCH TO EXISTING WALL FINISH).
7. THIS COMBINATION SPEAKER-STROBE AND ASSOCIATE CONDUIT ARE ALSO SHOWN ON SPEAKER INSTALLATION PLAN DWG E-3.

STROBE CIRCUIT/LOADING TABLE

STROBE TYPE AND RATING	TYPE	15cd	15/17cd (EXISTING)	30cd	75cd	110cd	CURRENT PER CIRCUIT (AMPS)	CIRCUIT LENGTH (ft.)
	CURRENT IN AMPS (A)	0.080	0.115	0.135	0.245	0.300		
QUANTITY OF STROBES PER CIRCUIT	STR-A	4	3	4	1	-	1.450	270
	STR-B	7	-	1	2	-	1.185	330
	STR-C	7	-	-	1	2	1.105	245
	STR-D	12	-	2	-	-	1.230	370
	STR-E	7	3	3	-	-	1.310	325
	STR-F	12	-	2	1	-	1.230	295
GRAND TOTAL								1835

Sheet of

ISSUES

SAMPLE


FOR REFERENCE USE ONLY

Rev Date Revision


Desiged by Drawn by Checked by

Date


Contract Number Drawing Number

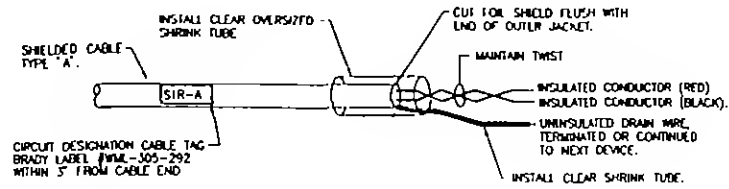


TYPICAL SHIELD/DRAIN INSULATING METHOD "A"
N.T.S.

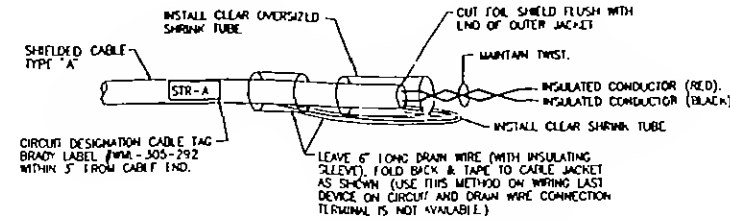


TYPICAL SHIELD/DRAIN INSULATING METHOD "B"
N.T.S.

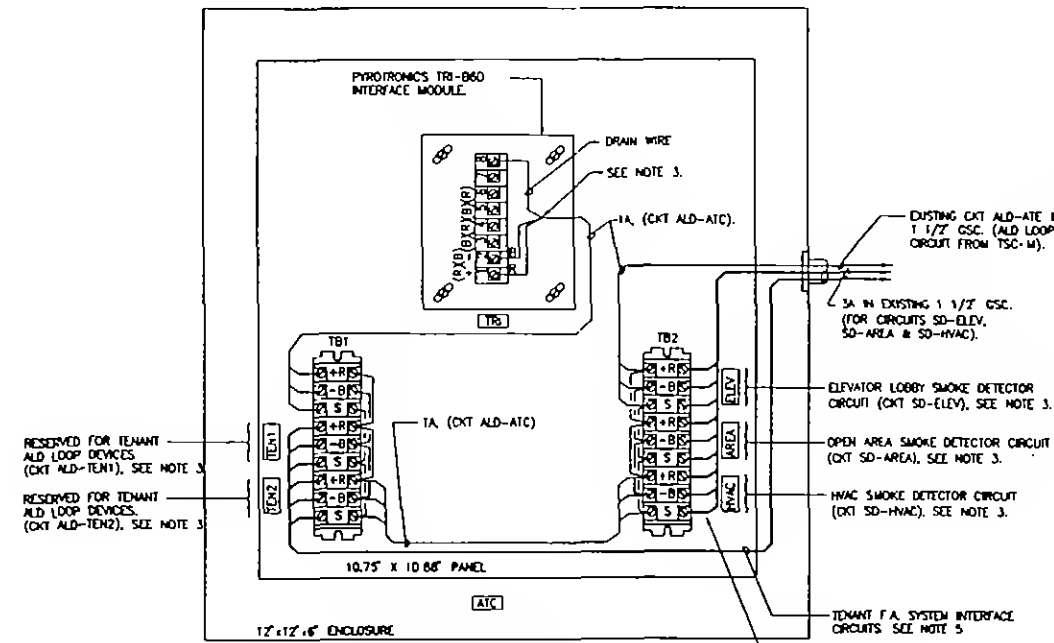


ATG CABINET
BLOCK WIRING DIAGRAM
N.T.S.

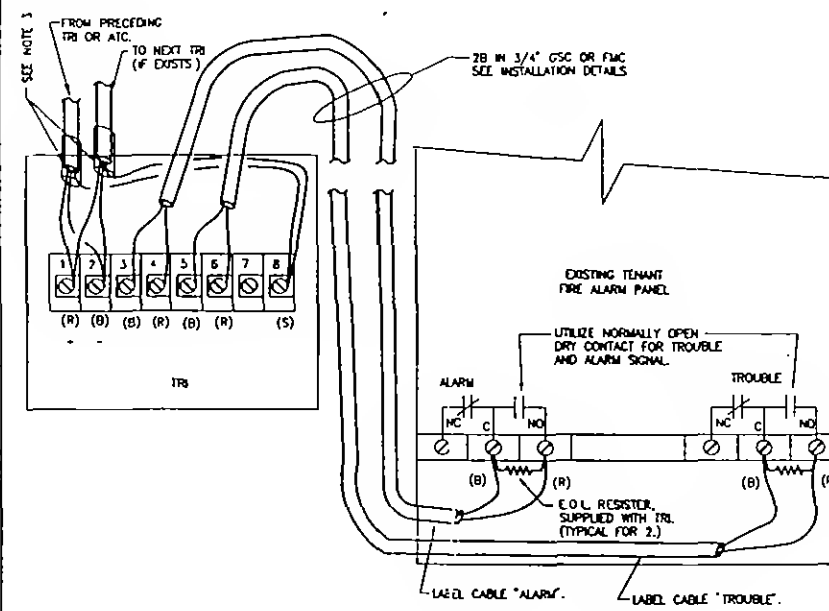


TYPICAL TRI WIRING DIAGRAM OF TENANT F.A. SYSTEM INTERFACE
N.T.S.

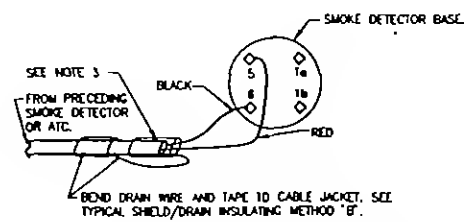


TYPICAL SMOKE DETECTOR WIRING DIAGRAM
N.T.S.

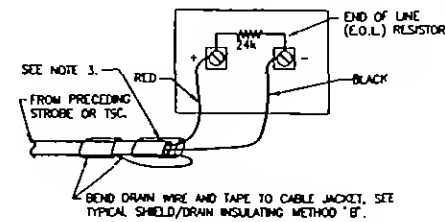

TYPICAL STROBE WIRING DIAGRAM
N.T.S.

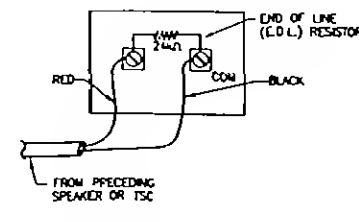

TYPICAL SPEAKER WIRING DIAGRAM
N.T.S.

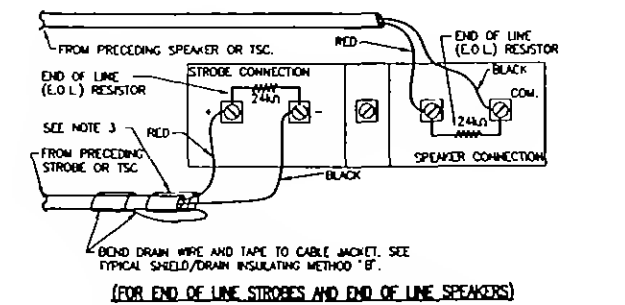

TYPICAL STROBE/SPEAKER COMBINATION UNIT WIRING DIAGRAM
N.T.S.

NOTES:

1. FOR LEGEND/SPECIFICATION, CIRCUIT LEGEND, INFORMATION LEGEND, ABBREVIATIONS AND GENERAL NOTES, SEE DRAWING REF-E-1.
2. WIRING DIAGRAMS SHOWN ARE SCHEMATIC REPRESENTATIONS FOR CONNECTIONS ONLY. FOR DEVICE INSTALLATION, REFER TO INSTALLATION DETAILS ON DRAWING REF-E-2.
3. INSULATE SHIELD & DRAIN WIRE AS SHOWN ON TYPICAL SHIELD/DRAIN INSULATING METHOD.
4. SHIELD MUST BE CONTINUOUS AND INSULATED FROM BOXES, CONDUITS, ETC.
5. INTERFACE TENANT FIRE ALARM SYSTEMS BY UTILIZING INTERFACING RELAY (TRI-B60) AND CONNECTING TO LOOP DEVICE CIRCUIT ALD-TEXT1 OR ALD-TEXT2 AS FOLLOWS:
ONE RELAY
TEXT1 - FOR NORTH OF MAIN CORRIDOR
TEXT2 - FOR SOUTH OF MAIN CORRIDOR
TWO RELAYS
TEXT1 - FOR WEST OF MAIN CORRIDOR
TEXT2 - FOR EAST OF MAIN CORRIDOR.

Sheet 01


ISSUES

SAMPLE
FOR REFERENCE USE ONLY

Designed by Drawn by Checked by

Date

Contract Number Drawing Number

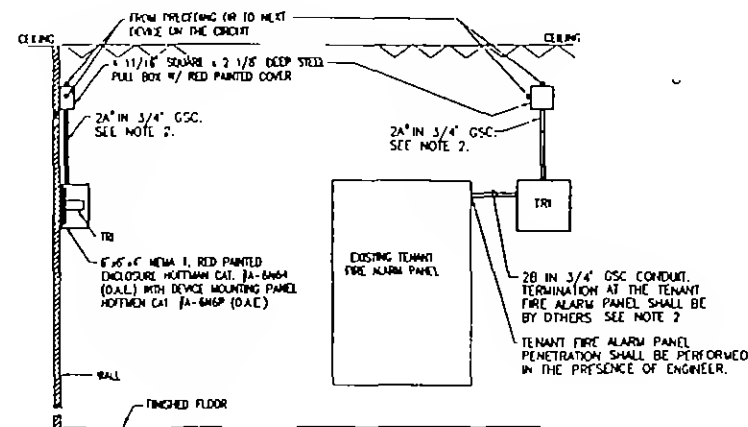


SIDE VIEW

FRONT VIEW

TYPICAL SURFACE MOUNTED TRI INSTALLATION DETAIL "J"
(NEAR EXISTING SURFACE MOUNTED TENANT F.A. PANEL)

N.T.S.

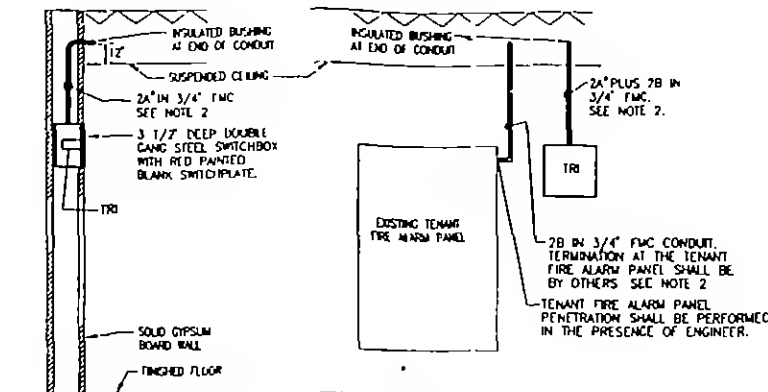

SIDE VIEW

FRONT VIEW

TYPICAL FLUSH MOUNTED TRI INSTALLATION DETAIL "I"
(NEAR EXISTING FLUSH MOUNTED TENANT F.A. PANEL)


N.T.S.

NOTES:

1. FOR ABBREVIATIONS, TERMINATION & CIRCUIT LEGEND, GENERAL NOTES AND LEGEND/SPECIFICATION, SEE DWG E-1.
2. FOR WIRING DIAGRAMS, SEE DWG E-3.
3. CONTRACTOR SHALL INSTALL THE FIRE ALARM DEVICE AT 80" ABOVE FINISHED FLOOR OR 6" BELOW SUSPENDED CEILING, WHICHEVER IS LOWER.
4. RETURN AIR SMOKE DETECTORS SHALL BE MOUNTED 6" IN FRONT OF THE RETURN AIR GRILL.


Sheet of

ISSUES

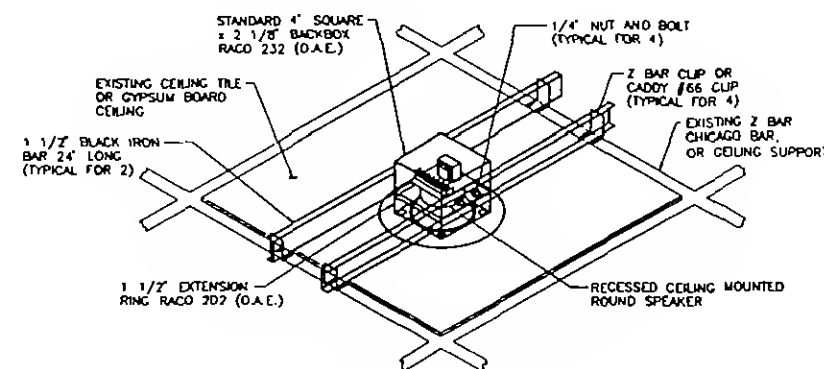


TYPICAL RECESSED SPEAKER INSTALLATION
DETAIL "A"

N.T.S.

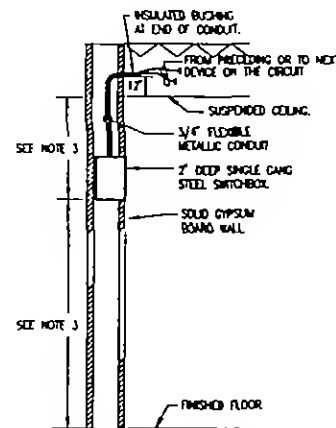


TYPICAL FLUSH MOUNTED
STROBE INSTALLATION DETAIL "B"

N.T.S.

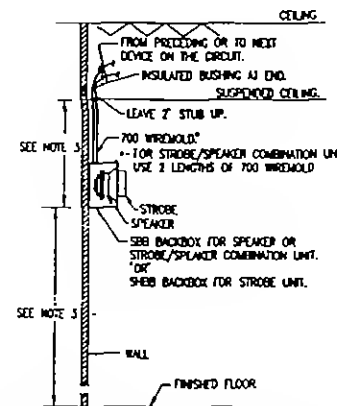


TYPICAL SURFACE MOUNTED (FOR OFFICE AREA)
STROBE, SPEAKER OR COMBINATION
INSTALLATION DETAIL "C"

N.T.S.

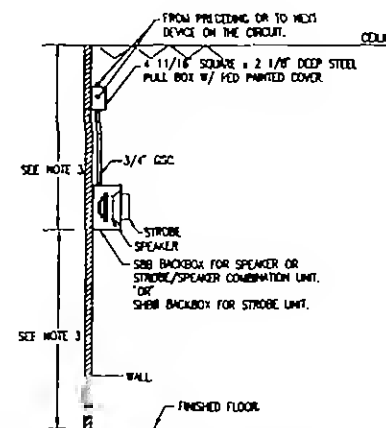


TYPICAL WALL MOUNTED (FOR MER TYPE AREA)
STROBE, SPEAKER OR COMBINATION
INSTALLATION DETAIL "D"

N.T.S.

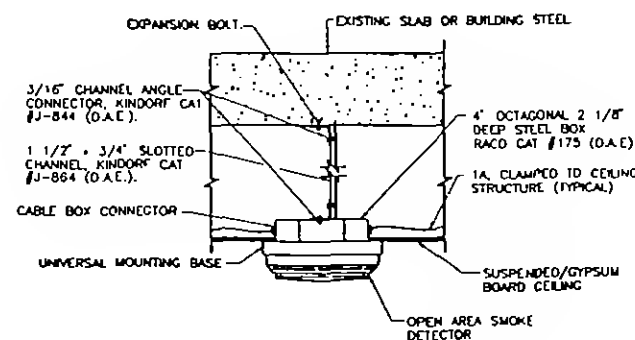


SMOKE DETECTOR INSTALLATION DETAIL "E"
(FOR SUSPENDED CEILING)

N.T.S.

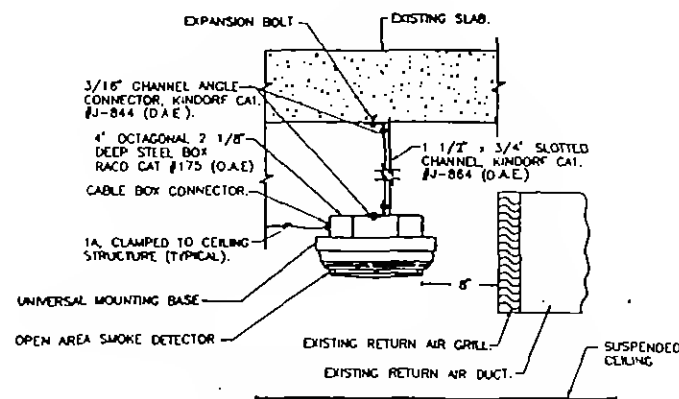


SMOKE DETECTOR INSTALLATION DETAIL "F"
(IN FRONT OF RETURN AIR GRILL)

N.T.S.

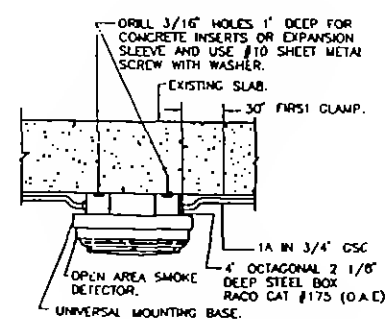

SMOKE DETECTOR INSTALLATION DETAIL "G"
(FOR OPEN CEILING)

N.T.S.

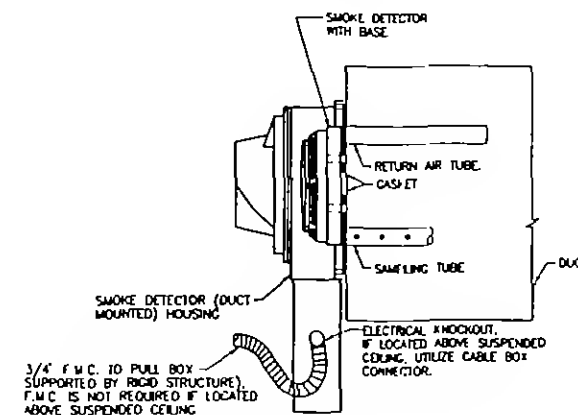

SMOKE DETECTOR INSTALLATION DETAIL "H"
(DUCT MOUNTED IN HOUSING W/ SAMPLING TUBE)

N.T.S.

No Date Revision

Title

Designed by Drawn by Checked by

Date


Contract Number Drawing Number

SAMPLE FOR REFERENCE USE ONLY


RETURN AIR SMOKE DETECTORS INSTALLATION NOTES.

Sheet of


ISSUES

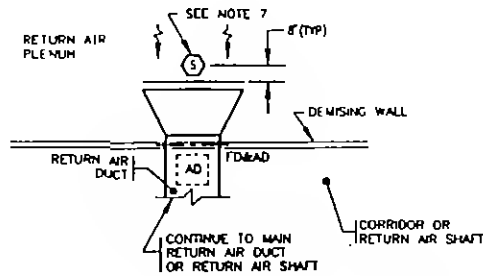


TYPICAL ARRANGEMENT PART PLAN "1A"

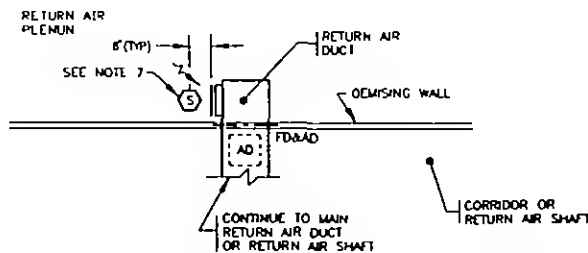


TYPICAL ARRANGEMENT PART PLAN "1B"

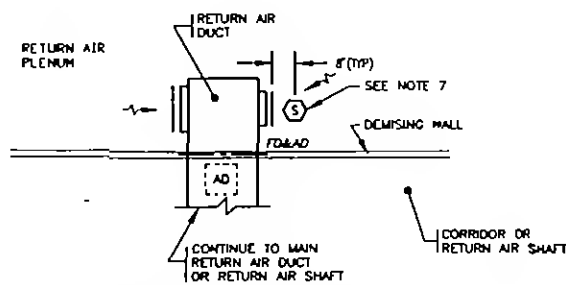


TYPICAL ARRANGEMENT PART PLAN "2A"

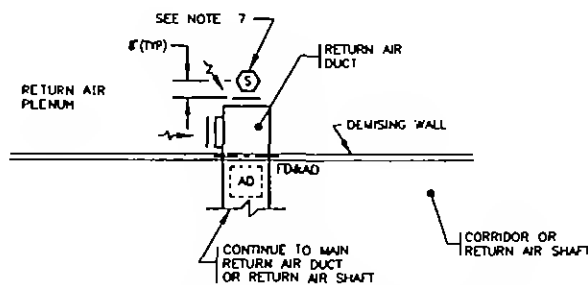


TYPICAL ARRANGEMENT PART PLAN "2B"

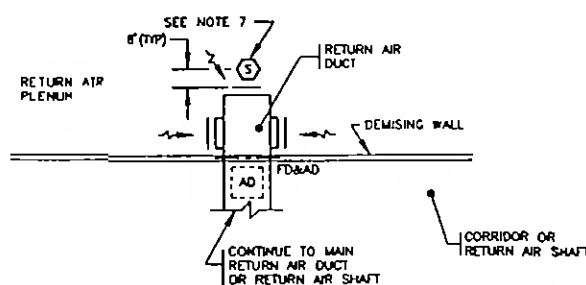


TYPICAL ARRANGEMENT PART PLAN "3"

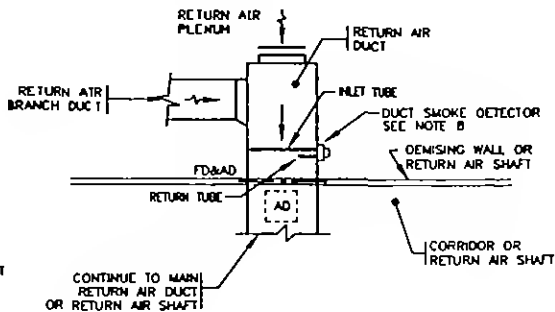

TYPICAL ARRANGEMENT PART PLAN "4"



TYPICAL ARRANGEMENT ELEVATION "X"

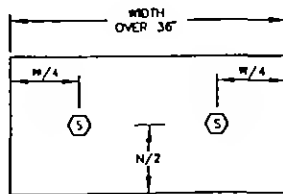

TYPICAL ARRANGEMENT ELEVATION "Y"

SAMPLING TUBE SCHEDULE			
DUCT WIDTH RANGE	MODEL	ACTUAL TUBE LENGTH	REMARKS
1'-0" - 1'-8"	STA-2	2 FT.	PIYOTRONICS AS STANDARD
1'-8" - 3'-5"	STA-3	3 FT. - 8 IN.	
3'-5" - 6'-5"	STA-6	6 FT. - 6 IN.	
6'-5" - 9'-0"	STA-10	10 FT.	

NOTE: IF NECESSARY, TIE THE INLET SAMPLING TUBE FOR MANUFACTURER'S RECOMMENDATIONS.

LEGEND	
	INSTALL NEW
	EXISTING DUCTWORK
	EXISTING VOLUME DAMPER
	EXISTING DUCT WITH FIRE DAMPER
	EXISTING DUCT WITH RETURN GRILLE
	FIRE DAMPER AND ACCESS DOOR
	NEW SMOKE DETECTOR
	FIRE DAMPER
	DUCT HEIGHT
	DUCT WIDTH
	EXISTING ACCESS DOOR

- SMOKE DETECTORS ARE TO BE INSTALLED AT EACH CONNECTION TO THE RETURN AIR SHAFTS ABOVE THE FINISHED HUNG CEILING, EITHER IN FRONT OF THE RETURN AIR GRILLE OPENING(S) OR WITHIN THE RETURN AIR DUCT, AS INDICATED ON THIS DRAWING. THE RETURN AIR SHAFTS ARE LOCATED AT THE FOUR QUADRANTS OF THE CORE AREA ON EACH TENANT FLOOR. REFER TO THE REFERENCE WORLD TRADE CENTER MECHANICAL BASE BUILDING DRAWINGS FOR THE LOCATIONS OF THE RETURN AIR SHAFTS ON EACH TENANT FLOOR.
- REFER TO ELECTRICAL DRAWINGS FOR LOCATIONS, DETAILS AND SPECIFICATIONS OF THE SMOKE DETECTORS. THE CONTRACTOR SHALL FURNISH AND INSTALL ALL SMOKE DETECTORS IDENTIFIED ON THE ELECTRICAL DRAWINGS AND ADDITIONAL SMOKE DETECTORS AS MAY BE REQUIRED AS A RESULT OF THE CONTRACTOR'S FIELD SURVEY (SEE NOTE E-3) AND IN CONFORMANCE WITH THE NOTES ON THIS DRAWING. THE INSTALLATION OF ADDITIONAL SMOKE DETECTORS THAT ARE NOT IDENTIFIED ON THE ELECTRICAL DRAWINGS ARE TO BE PERFORMED UNDER THE "NET COST" PROVISIONS OF THIS CONTRACT.
- THE CONTRACTOR SHALL FIELD SURVEY THE LOCATIONS AND SIZES OF THE RETURN AIR DUCTS AND GRILLE OPENINGS ABOVE THE FINISHED HUNG CEILING TO VERIFY AND DETERMINE THE LOCATIONS AND THE NUMBER OF SMOKE DETECTORS BASED ON THE CRITERIA SET FORTH BY THE NOTES ON THIS DRAWING. THE CONTRACTOR SHALL NOTIFY THE ENGINEER OF ANY DEVIATION FROM THE TYPICAL ARRANGEMENT PART PLANS DUE TO ACTUAL FIELD CONDITIONS.
- PRIOR TO THE INSTALLATION OF ADDITIONAL SMOKE DETECTORS THAT ARE NOT IDENTIFIED ON THE ELECTRICAL DRAWINGS, THE CONTRACTOR SHALL RECEIVE APPROVAL FROM THE ENGINEER. THE CONTRACTOR SHALL PROGRAM THE ADDITIONAL SMOKE DETECTORS WITH ADDRESSES TO BE ASSIGNED BY THE ENGINEER.
- ALL SMOKE DETECTORS SHALL BE INSTALLED IN CONFORMANCE WITH MANUFACTURER'S RECOMMENDATIONS, OR AS APPROVED BY THE ENGINEER.
- SMOKE DETECTORS TO BE INSTALLED IN FRONT OF RETURN AIR GRILLE OPENINGS SHALL BE DESIGNED FOR HIGH AIR VELOCITY APPLICATION, WITH A RANGE FROM 0 TO 1,200 FEET PER MINUTE, AS SPECIFIED ON THE DRAWING E-1. SMOKE DETECTORS TO BE INSTALLED WITHIN DUCTWORK SHALL BE DESIGNED FOR A HIGH VELOCITY OF 500 TO 4000 FEET PER MINUTE, AS SPECIFIED ON DRAWING E-1.
- FOR RETURN AIR GRILLE OPENING ASSOCIATED WITH DUCTWORK THAT EXTENDS LESS THAN 15 FEET FROM THE RETURN AIR SHAFT, SMOKE DETECTOR(S) SHALL BE INSTALLED IN THE CEILING PLENUM, IF IN FRONT OF THE RETURN AIR GRILLE OPENING, AND AT THE CENTERLINE OF THE OPENING HEIGHT FOR RETURN AIR GRILLE OPENING OF A WIDTH EQUAL OR LESS THAN 36", PROVIDE ONE (1) SMOKE DETECTOR AS SHOWN ON TYPICAL ARRANGEMENT ELEVATION "X". FOR RETURN AIR GRILLE OPENING OF A WIDTH GREATER THAN 36", PROVIDE TWO (2) SMOKE DETECTORS AS SHOWN ON TYPICAL ARRANGEMENT ELEVATION "Y". IN ADDITION, THE PLACEMENT OF THE SMOKE DETECTOR(S) FOR THE DIFFERENT RETURN AIR GRILLE CONFIGURATIONS SHALL BE AS FOLLOWS:
 - FOR RETURN AIR DUCT WITH A SINGLE RETURN AIR GRILLE OPENING, INSTALL SMOKE DETECTOR(S) AS SHOWN ON TYPICAL ARRANGEMENT PART PLANS "1A" AND "1B".
 - FOR RETURN AIR DUCT WITH TWO (2) RETURN AIR GRILLE OPENINGS, SMOKE DETECTOR(S) SHALL ONLY BE INSTALLED IN FRONT OF THE SMALLER OPENING AS SHOWN ON TYPICAL ARRANGEMENT PART PLANS "2A" AND "2B".
 - FOR RETURN AIR DUCT WITH THREE (3) RETURN AIR GRILLE OPENINGS, SMOKE DETECTOR(S) SHALL ONLY BE INSTALLED IN FRONT OF THE CENTER OPENING AS SHOWN ON TYPICAL ARRANGEMENT PART PLAN "3".
- FOR ANY RETURN AIR DUCTWORK THAT HAS NO GRILLE OPENING ABOVE THE FINISHED HUNG CEILING OR HAS A TOTAL LENGTH OF 15 FEET OR MORE FROM THE RETURN AIR SHAFT, DUCT MOUNTED SMOKE DETECTOR(S) SHALL BE INSTALLED AT THE CENTER LINE OF THE DUCT HEIGHT AND AS CLOSE AS POSSIBLE TO SIX (6) DUCT WIDTHS FROM THE NEAREST RETURN AIR INLET OR BRANCH DUCT. SELECTION OF SAMPLING TUBE LENGTH SHALL BE AS INDICATED IN THE SAMPLING TUBE SCHEDULE.
- DO NOT INSTALL SMOKE DETECTORS AT TRANSFER AIR OR SUPPLY AIR OPENINGS.
- ANY WORK TO BE PERFORMED THAT REQUIRES AN HVAC EQUIPMENT SHUTDOWN OR INTERRUPTION TO NORMAL OPERATION SHALL BE PERFORMED DURING OFF-HOURS, OR AS DIRECTED BY THE ENGINEER. THE CONTRACTOR SHALL NOTIFY THE AUTHORITY OF ANY EQUIPMENT SHUTDOWN 48 HOURS PRIOR TO THE FIELD WORK.
- UPON COMPLETION OF FIELD WORK, THE CONTRACTOR SHALL MARK-UP AND SUBMIT A SET OF CONTRACT DRAWINGS INDICATING THE LOCATIONS AND ADDRESSES OF ALL SMOKE DETECTORS INSTALLED BY HIM, INCLUDING THE DIMENSIONS AND CONFIGURATIONS OF ALL RETURN AIR DUCTS AND GRILLE OPENINGS WHERE SMOKE DETECTORS ARE REQUIRED.

SAMPLE FOR REFERENCE USE ONLY

Designed by Drawn by Checked by

Date

Contract Number Drawing Number